
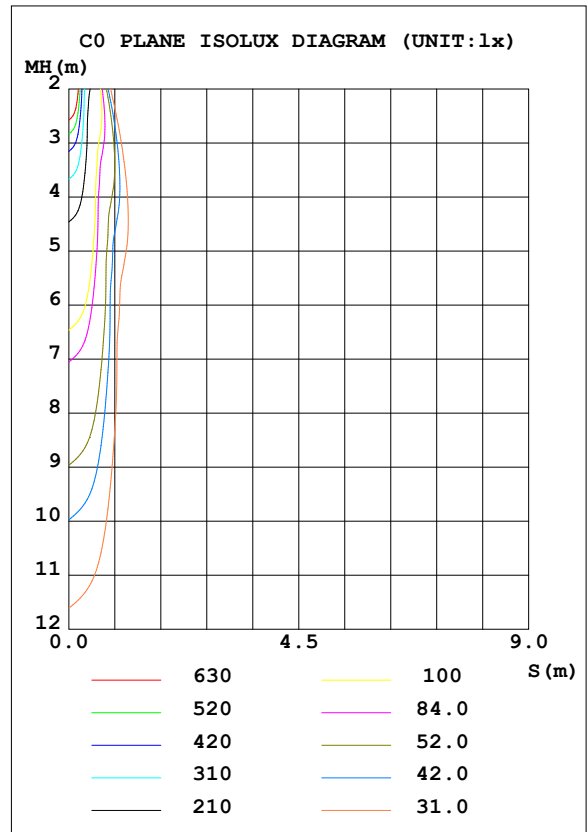


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.1V I:0.0353A P:6.701W PF:0.8577 Freq:59.98Hz Lamp Flux:450.365x1 lm		
NAME: S3514LED	TYPE:	WEIGHT:
SPEC.:P-S3514LED-7W3015-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 67.21 lm/W			
MODEL	CLU7A2 1201	I _{max} (cd)	4180	S/MH (C0/180)	0.26
NOMINAL POWER (W)	7W	LOR (%)	100.0	S/MH (C90/270)	0.26
RATED VOLTAGE (V)	220.0	TOTAL FLUX (lm)	450.37	η UP, DN (C0-180)	0.2, 47.5
NOMINAL FLUX (lm)	450.365	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 52.2
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	220.2	η down (%)	99.7	CIBSE SHR MAX	1.00

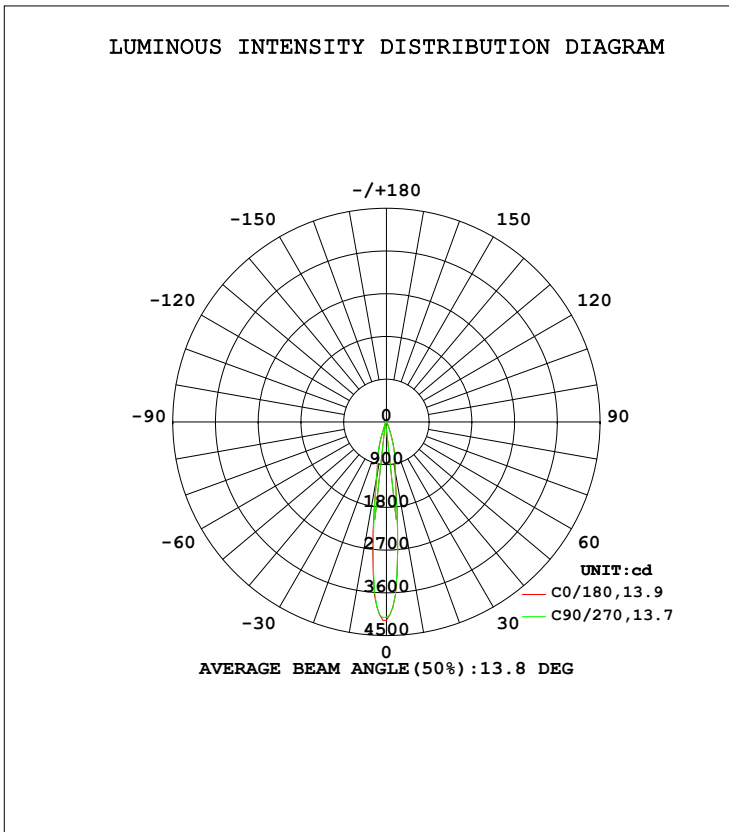

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Xie Bi
 Test Date: 2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 6.800m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270				γ	Φ zone	Φ total	%lum,lamp
10	1050	1051	1173	1236				0- 10	214.8	214.8	47.7,47.7
20	261.0	254.9	281.9	284.4				10- 20	173.8	388.6	86.3,86.3
30	33.66	35.93	33.17	30.26				20- 30	45.27	433.9	96.3,96.3
40	6.431	6.633	6.654	7.044				30- 40	10.33	444.3	98.6,98.6
50	2.079	2.129	1.990	2.035				40- 50	2.808	447.1	99.3,99.3
60	0.8651	1.084	0.7067	0.7884				50- 60	1.204	448.3	99.5,99.5
70	0.1242	0.0763	0.0860	0.1528				60- 70	0.5264	448.8	99.6,99.6
80	0.0382	0.0096	0.0143	0.0430				70- 80	0.0563	448.8	99.7,99.7
90	0.0048	0	0.0096	0.0096				80- 90	0.0163	448.9	99.7,99.7
100	0.0048	0.0048	0.0096	0.0096				90-100	0.0076	448.9	99.7,99.7
110	0.0048	0.0048	0.0096	0.0096				100-110	0.0076	448.9	99.7,99.7
120	0.0048	0.0096	0.0143	0.0143				110-120	0.0090	448.9	99.7,99.7
130	0.0048	0.0287	0.0334	0.0191				120-130	0.0146	448.9	99.7,99.7
140	0.0955	0.1483	0.0766	0.0334				130-140	0.0322	448.9	99.7,99.7
150	0.6967	0.7452	0.3441	0.3006				140-150	0.1597	449.1	99.7,99.7
160	2.206	2.237	1.239	1.185				150-160	0.4741	449.6	99.8,99.8
170	2.427	2.383	2.130	2.049				160-170	0.5990	450.2	100,100
180	1.906	1.911	1.906	1.920				170-180	0.2004	450.4	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.1V I:0.0353A P:6.701W PF:0.8577 Freq:59.98Hz Lamp Flux:450.365x1 lm		
NAME: S3514LED	TYPE:	WEIGHT:
SPEC.:P-S3514LED-7W3015-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

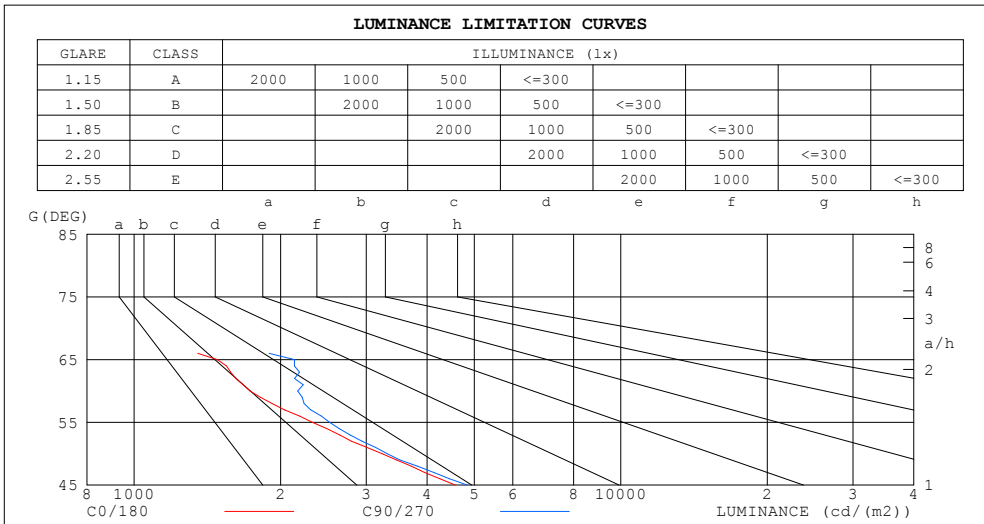

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	274	0
80	220	55
75	258	55
70	363	223
65	1482	2136
60	1730	2168
55	2325	2522
50	3234	3313
45	4572	4839


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.1V I:0.0353A P:6.701W PF:0.8577 Freq:59.98Hz Lamp Flux:450.365x1 lm		
NAME: S3514LED	TYPE:	WEIGHT:
SPEC.:P-S3514LED-7W3015-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
	ρw	ρfc	RCR	ρw	ρfc	RCR	ρw	ρfc	RCR	ρw	ρfc	RCR	ρw	ρfc	RCR	
	50%	20%	RCR:Room Cavity Ratio	50%	20%	RCR:Room Cavity Ratio	50%	20%	RCR:Room Cavity Ratio	50%	20%	RCR:Room Cavity Ratio	50%	20%	RCR:Room Cavity Ratio	
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.13	1.12	1.10	1.11	1.10	1.08	1.07	1.06	1.05	1.03	1.03	1.02	1.00	.99	.99	.97
2.0	1.09	1.06	1.04	1.07	1.04	1.02	1.04	1.02	1.00	1.01	.99	.98	.98	.97	.96	.95
3.0	1.05	1.01	.99	1.03	1.00	.98	1.01	.98	.96	.98	.96	.95	.96	.95	.93	.92
4.0	1.01	.97	.95	1.00	.97	.94	.98	.95	.93	.96	.94	.92	.94	.93	.91	.90
5.0	.98	.94	.92	.97	.94	.91	.96	.93	.90	.94	.92	.90	.93	.91	.89	.88
6.0	.95	.91	.89	.95	.91	.88	.93	.90	.88	.92	.89	.87	.91	.89	.87	.86
7.0	.93	.89	.86	.92	.89	.86	.91	.88	.86	.90	.87	.85	.89	.87	.85	.84
8.0	.90	.87	.84	.90	.86	.84	.89	.86	.84	.88	.85	.83	.87	.85	.83	.82
9.0	.88	.85	.82	.88	.85	.82	.87	.84	.82	.86	.84	.82	.86	.83	.81	.81
10.0	.86	.83	.81	.86	.83	.80	.85	.82	.80	.85	.82	.80	.84	.82	.80	.79

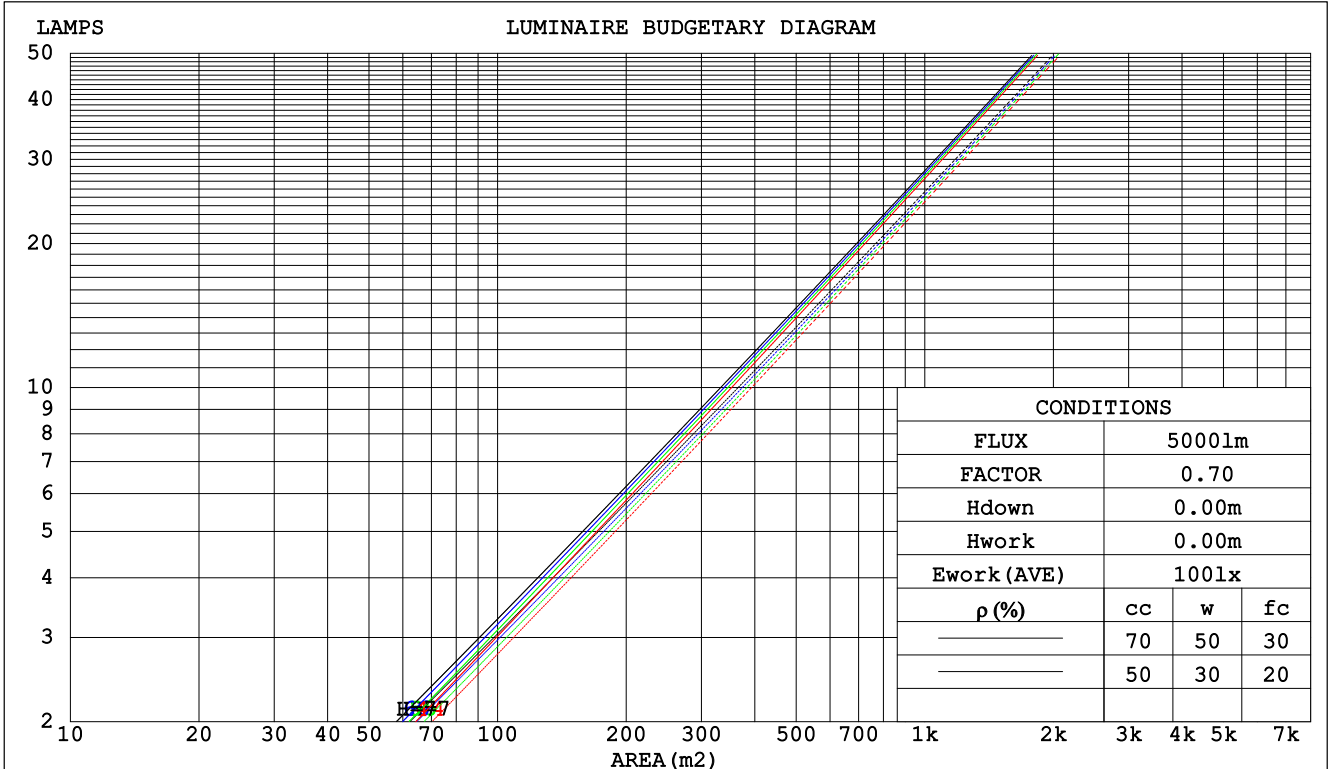

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:221.1V I:0.0353A P:6.701W PF:0.8577 Freq:59.98Hz Lamp Flux:450.365x1 lm		
NAME: S3514LED	TYPE:	WEIGHT:
SPEC.:P-S3514LED-7W3015-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.127	.072	.023	.120	.069	.022	.108	.062	.020	.096	.056	.018	.086	.050	.016	
2.0	.117	.064	.020	.111	.061	.019	.101	.056	.017	.091	.051	.016	.083	.047	.015	
3.0	.108	.057	.017	.103	.055	.017	.095	.051	.016	.087	.048	.015	.080	.044	.014	
4.0	.101	.052	.015	.097	.051	.015	.090	.047	.014	.083	.045	.013	.077	.042	.013	
5.0	.094	.048	.014	.091	.047	.014	.085	.044	.013	.079	.042	.012	.074	.039	.012	
6.0	.089	.044	.013	.086	.043	.012	.081	.041	.012	.076	.039	.012	.071	.037	.011	
7.0	.084	.041	.012	.081	.041	.012	.077	.039	.011	.073	.037	.011	.069	.036	.010	
8.0	.080	.039	.011	.077	.038	.011	.074	.037	.010	.070	.035	.010	.066	.034	.010	
9.0	.076	.037	.010	.074	.036	.010	.070	.035	.010	.067	.034	.010	.064	.033	.009	
10.0	.072	.035	.010	.071	.034	.010	.068	.033	.009	.065	.032	.009	.062	.031	.009	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.170	.160	.151	.146	.138	.130	.100	.095	.090	.057	.055	.052	.018	.018	.017	
2.0	.151	.135	.122	.130	.117	.105	.089	.081	.073	.051	.047	.043	.016	.015	.014	
3.0	.136	.116	.100	.116	.100	.087	.080	.069	.061	.046	.041	.036	.015	.013	.012	
4.0	.123	.100	.083	.105	.087	.072	.072	.060	.051	.042	.035	.030	.013	.012	.010	
5.0	.112	.088	.070	.096	.076	.061	.066	.053	.043	.038	.031	.026	.012	.010	.008	
6.0	.103	.078	.060	.088	.067	.052	.061	.047	.037	.035	.028	.022	.011	.009	.007	
7.0	.095	.069	.052	.081	.060	.045	.056	.042	.032	.033	.025	.019	.011	.008	.006	
8.0	.088	.062	.045	.076	.054	.039	.052	.038	.028	.030	.022	.017	.010	.007	.005	
9.0	.082	.057	.039	.071	.049	.034	.049	.035	.024	.028	.020	.015	.009	.007	.005	
10.0	.077	.052	.035	.066	.045	.031	.046	.032	.022	.027	.019	.013	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.1V I:0.0353A P:6.701W PF:0.8577 Freq:59.98Hz Lamp Flux:450.365x1 lm										
NAME: S3514LED					TYPE:			WEIGHT:		
SPEC.:P-S3514LED-7W3015-CI15037R90-LDE700					DIM.:			SERIAL No.:		
MFR.: CETTIGA					SUR.:0.0001			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.7	10.3	9.9	10.4	10.6	10.1	10.7	10.3	10.9	11.0
3H	9.7	10.2	9.9	10.4	10.6	10.1	10.7	10.4	10.9	11.0
4H	9.6	10.1	9.8	10.3	10.5	10.0	10.6	10.3	10.8	11.0
6H	9.5	10.0	9.8	10.2	10.5	10.0	10.5	10.2	10.7	10.9
8H	9.5	9.9	9.7	10.2	10.4	9.9	10.4	10.2	10.6	10.9
12H	9.4	9.9	9.7	10.1	10.4	9.9	10.3	10.2	10.6	10.9
4H 2H	9.6	10.1	9.9	10.4	10.6	10.0	10.6	10.3	10.8	11.0
3H	9.5	10.0	9.9	10.3	10.5	10.0	10.5	10.3	10.7	11.0
4H	9.5	9.9	9.8	10.2	10.5	9.9	10.3	10.2	10.6	10.9
6H	9.4	9.7	9.7	10.1	10.4	9.8	10.2	10.2	10.5	10.9
8H	9.3	9.7	9.7	10.0	10.4	9.7	10.1	10.1	10.5	10.8
12H	9.3	9.6	9.7	9.9	10.3	9.7	10.0	10.1	10.4	10.8
8H 4H	9.3	9.6	9.7	10.0	10.4	9.8	10.1	10.1	10.5	10.8
6H	9.2	9.5	9.6	9.9	10.3	9.6	9.9	10.1	10.3	10.7
8H	9.1	9.4	9.6	9.8	10.3	9.6	9.8	10.0	10.3	10.7
12H	9.1	9.3	9.5	9.7	10.2	9.5	9.7	10.0	10.2	10.6
12H 4H	9.2	9.6	9.6	9.9	10.3	9.7	10.0	10.1	10.4	10.8
6H	9.1	9.4	9.6	9.8	10.2	9.6	9.8	10.0	10.2	10.7
8H	9.1	9.3	9.5	9.7	10.2	9.5	9.7	10.0	10.2	10.6
Variations with the observer position at spacings:										
S = 1.0H	+ 2.8 / - 4.7					+ 2.9 / - 4.5				
1.5H	+ 4.4 / - 3.2					+ 4.6 / - 3.1				
2.0H	+ 2.8 / - 2.5					+ 2.8 / - 1.7				

CIE Pub.117, 450.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.8)

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.1V I:0.0353A P:6.701W PF:0.8577 Freq:59.98Hz Lamp Flux:450.365x1 lm		
NAME: S3514LED	TYPE:	WEIGHT:
SPEC.:P-S3514LED-7W3015-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	91	85	82	90	85	82	89	84	81	78
0.80	98	92	89	97	92	89	96	92	89	85
1.00	101	96	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	99	96	92
1.50	107	103	100	106	102	100	104	101	99	94
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	106	104	106	104	102	96
3.00	113	109	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	109	109	107	106	99
5.00	116	114	112	113	112	110	109	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:221.1V I:0.0353A P:6.701W PF:0.8577 Freq:59.98Hz Lamp Flux:450.365x1 lm		
NAME: S3514LED	TYPE:	WEIGHT:
SPEC.:P-S3514LED-7W3015-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

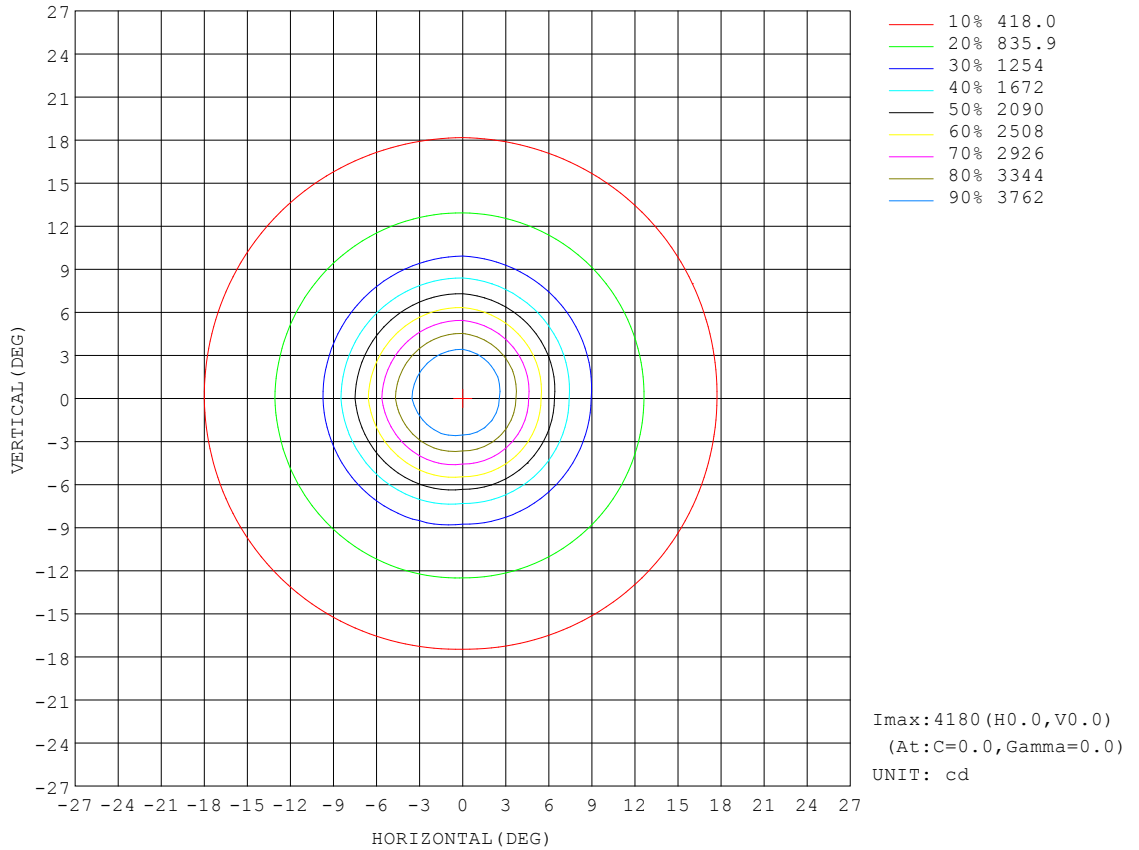


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks:

AAI Figure

Test:U:221.1V I:0.0353A P:6.701W PF:0.8577 Freq:59.98Hz Lamp Flux:450.365x1 lm		
NAME: S3514LED	TYPE:	WEIGHT:
SPEC.:P-S3514LED-7W3015-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

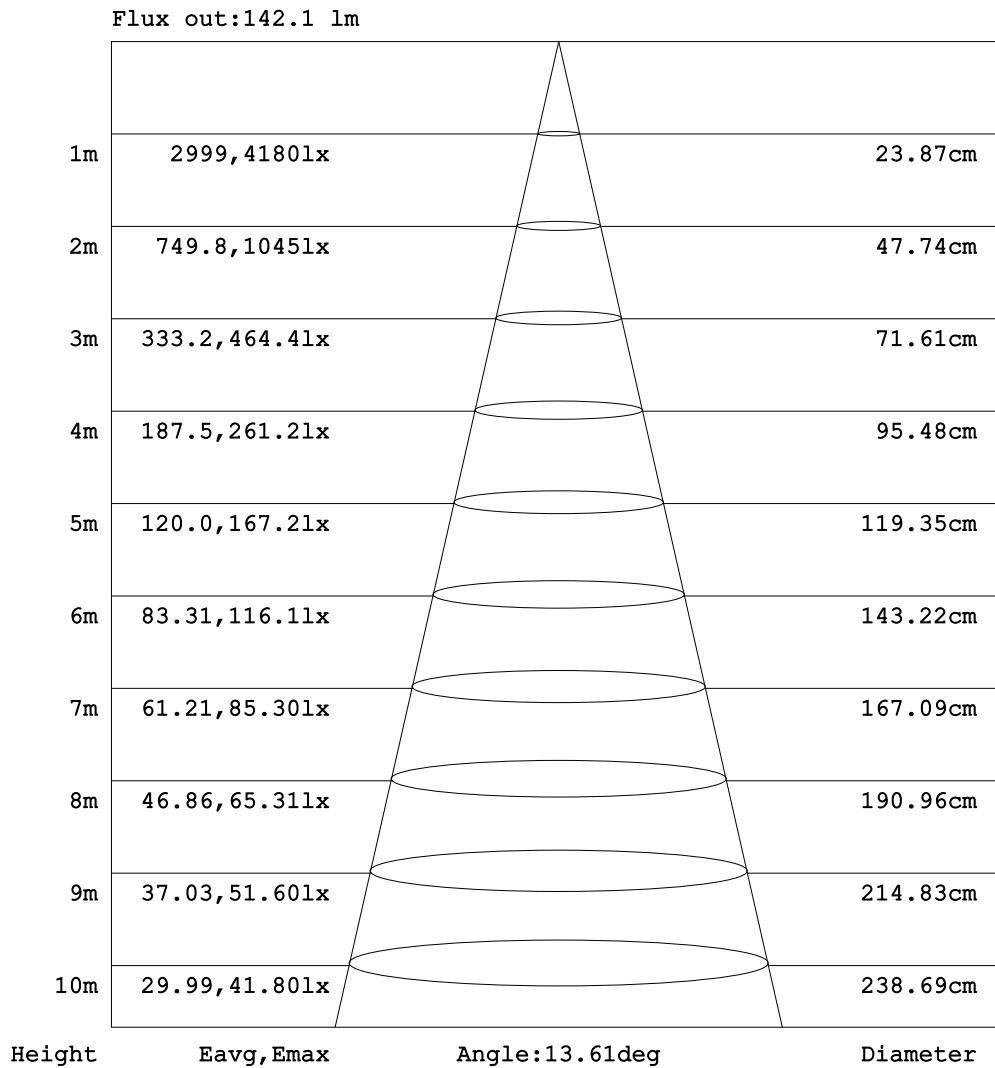


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:221.1V I:0.0353A P:6.701W PF:0.8577 Freq:59.98Hz Lamp Flux:450.365x1 lm		
NAME: S3514LED	TYPE:	WEIGHT:
SPEC.:P-S3514LED-7W3015-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

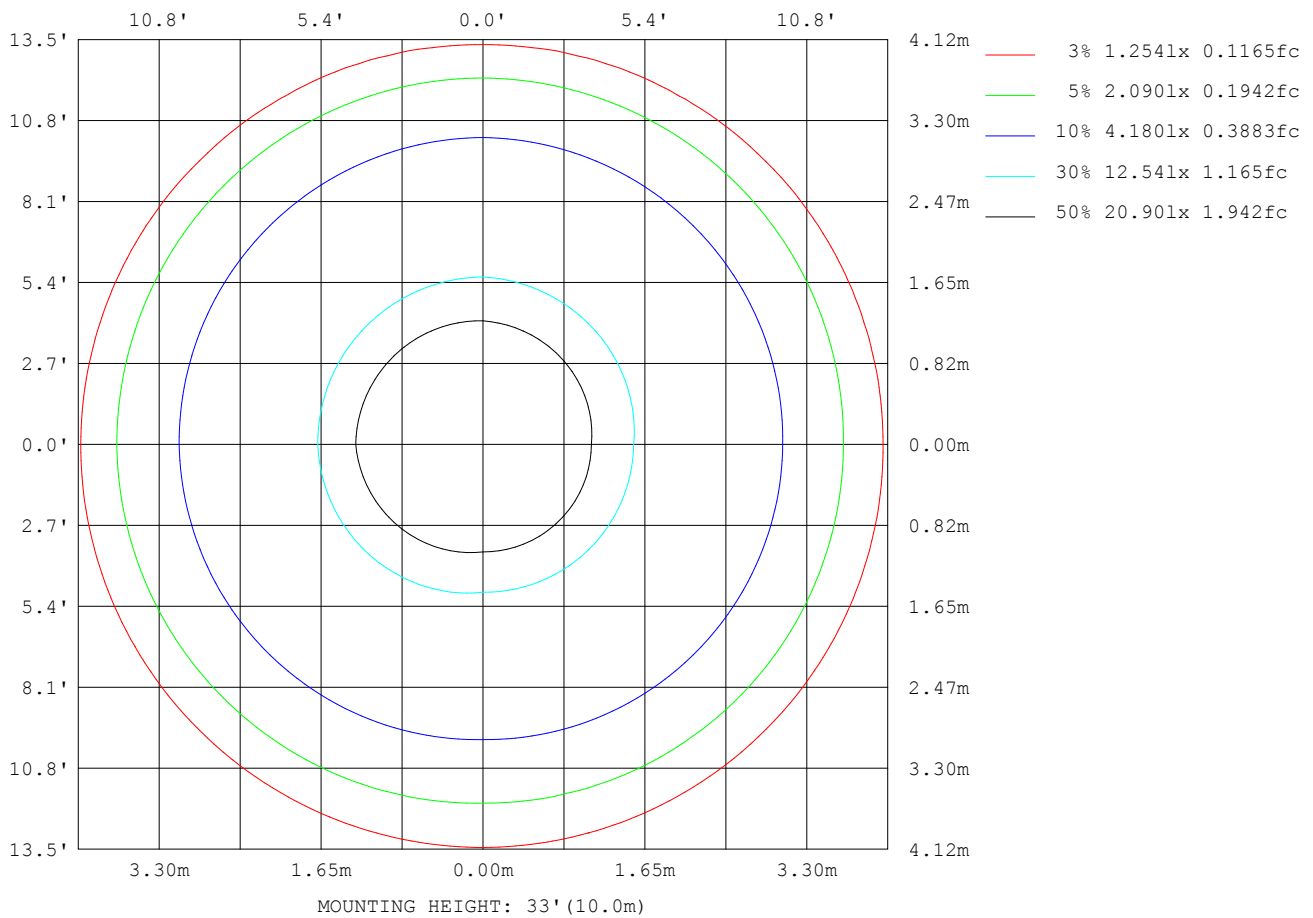

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:221.1V I:0.0353A P:6.701W PF:0.8577 Freq:59.98Hz Lamp Flux:450.365x1 lm		
NAME: S3514LED	TYPE:	WEIGHT:
SPEC.:P-S3514LED-7W3015-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1368
L_0~180 (75) av	166
L_0~180 (85) av	192
L_90~270 (65) av	1741
L_90~270 (75) av	175
L_90~270 (85) av	137
L_45 (65) av	1594
L_45 (75) av	166
L_45 (85) av	152

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks:

Planar Illuminance Curve

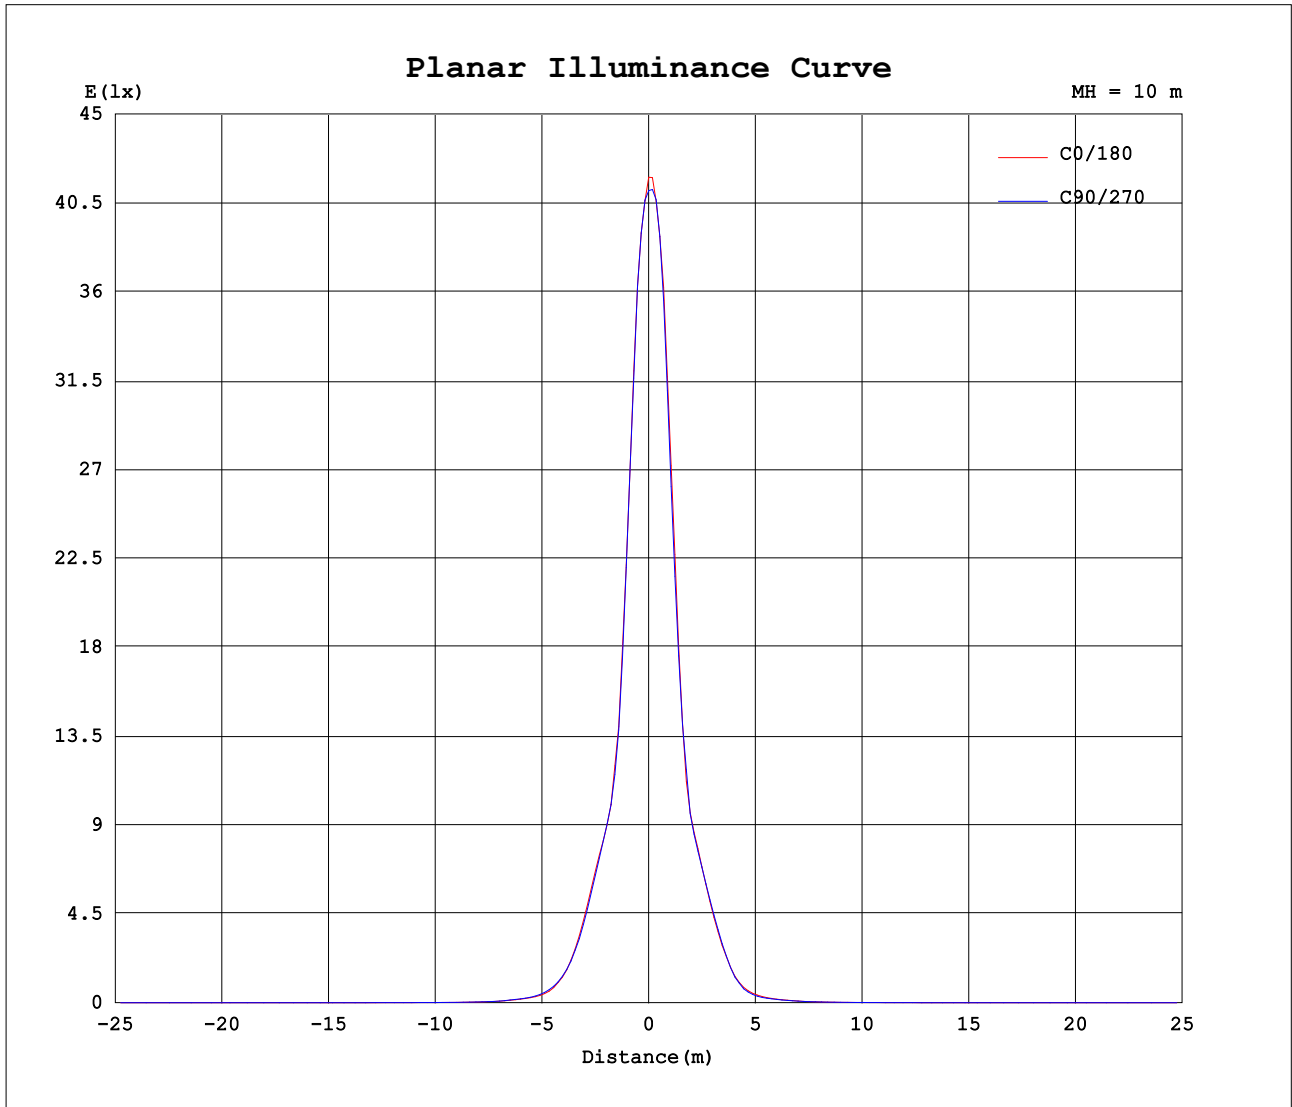

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Xie Bi
 Test Date: 2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 6.800m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.1V I:0.0353A P:6.701W PF:0.8577 Freq:59.98Hz Lamp Flux:450.365x1 lm		
NAME: S3514LED	TYPE:	WEIGHT:
SPEC.:P-S3514LED-7W3015-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270																
0	4180	4112	4180	4112																
5	2725	2729	3206	3135																
10	1050	1051	1173	1236																
15	648	624	666	669																
20	261	255	282	284																
25	78.8	88.8	81.4	72.7																
30	33.7	35.9	33.2	30.3																
35	14.4	15.3	15.7	15.1																
40	6.43	6.63	6.65	7.04																
45	3.23	3.42	3.25	3.47																
50	2.08	2.13	1.99	2.04																
55	1.33	1.45	1.17	1.23																
60	0.87	1.08	0.71	0.79																
65	0.63	0.90	0.53	0.57																
70	0.12	0.08	0.09	0.15																
75	0.07	0.01	0.02	0.08																
80	0.04	0.01	0.01	0.04																
85	0.02	0.00	0.01	0.02																
90	0.00	0.00	0.01	0.01																
95	0.00	0.00	0.01	0.01																
100	0.00	0.00	0.01	0.01																
105	0.00	0.00	0.01	0.01																
110	0.00	0.00	0.01	0.01																
115	0.00	0.00	0.01	0.02																
120	0.00	0.01	0.01	0.01																
125	0.00	0.01	0.02	0.02																
130	0.00	0.03	0.03	0.02																
135	0.01	0.06	0.05	0.02																
140	0.10	0.15	0.08	0.03																
145	0.31	0.36	0.16	0.16																
150	0.70	0.75	0.34	0.30																
155	1.42	1.44	0.66	0.61																
160	2.21	2.24	1.24	1.18																
165	2.60	2.59	1.90	1.83																
170	2.43	2.38	2.13	2.05																
175	2.06	2.03	1.98	1.99																
180	1.91	1.91	1.91	1.92																

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks: