


室内灯具光度数据


实测参数: U:232.27V I:0.0701A P:14.293W PF:0.8776 Freq:49.99Hz 实检光通:1076.31x1 lm		
灯具名称: 2922LED	灯具类型:	灯具重量:
灯具规格: P-2922LED-2x7W3048-CI20031R90-YML100	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

光源数据		光度数据				光效: 75.30 lm/W
型号	CLU701 1002	峰值光强(cd)	1628	S/MH(C0/180)	0.72	
标称功率(W)	2x7W	灯具效率(%)	100.0	S/MH(C90/270)	0.76	
额定电源电压(V)	220.0	总光通量(lm)	1076.3	η UP,DN(C0-180)	0.2,51.6	
额定光通量(lm)	1076.31	CIE分类	直接	η UP,DN(C180-360)	0.1,48.1	
灯具内光源数(只)	1	上射光通比(%)	0.3	CIBSE SHR NOM	0.75	
实测电源电压(V)	220.2	下射光通比(%)	99.7	CIBSE SHR MAX	0.80	

室内灯具配光曲线

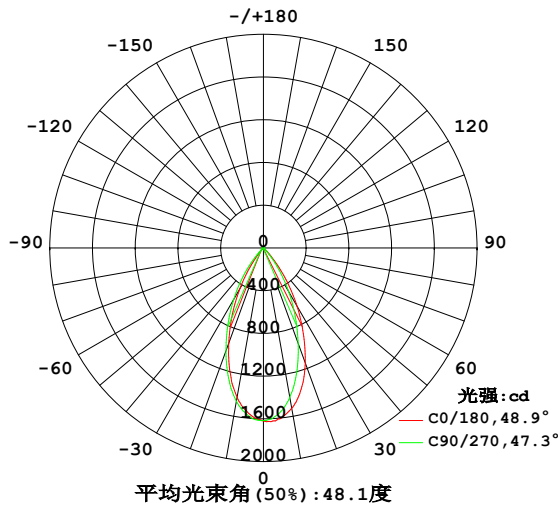

空间等照度曲线(单位:lx)

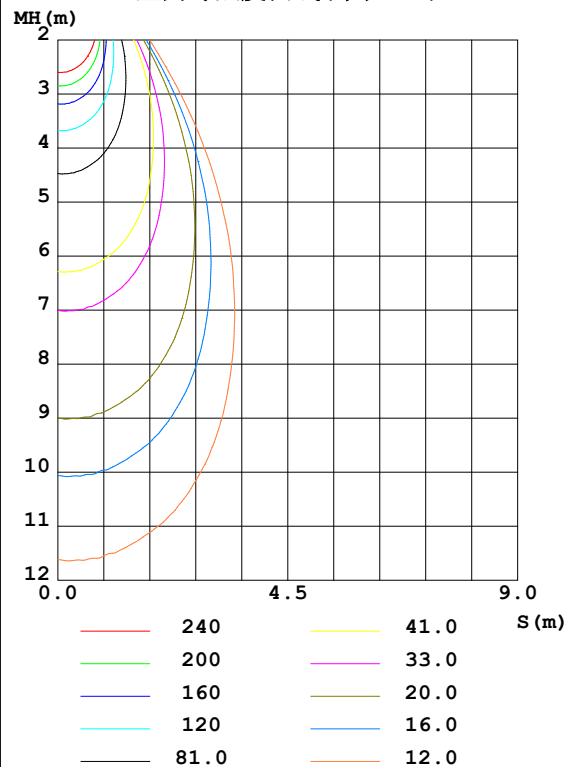

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-09-05

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:


γ	C0	C90	C180	C270					$\gamma(^{\circ})$	$\Phi_{\text{环}}$	$\Phi_{\text{总}}$	%lum, lamp
10	1523	1420	1418	1458					0- 10	146.7	146.7	13.6, 13.6
20	1145	950.8	950.5	1024					10- 20	348.2	494.9	46, 46
30	630.6	474.6	442.5	555.2					20- 30	348.2	843.2	78.3, 78.3
40	176.5	113.0	70.68	167.0					30- 40	191.6	1035	96.1, 96.1
50	9.673	6.025	2.039	11.87					40- 50	36.99	1072	99.6, 99.6
60	0.2586	0.1534	0.1585	0.2496					50- 60	1.391	1073	99.7, 99.7
70	0	0	0	0					60- 70	0.0492	1073	99.7, 99.7
80	0	0	0	0					70- 80	0	1073	99.7, 99.7
90	0	0	0	0					80- 90	0	1073	99.7, 99.7
100	0	0	0	0					90-100	0	1073	99.7, 99.7
110	0	0	0	0					100-110	0	1073	99.7, 99.7
120	0	0.0733	0.0192	0.0087					110-120	0.0050	1073	99.7, 99.7
130	0.2298	0.4203	0.2094	0.1550					120-130	0.1013	1073	99.7, 99.7
140	0.8263	1.087	0.7016	0.5457					130-140	0.3786	1074	99.8, 99.8
150	1.701	1.944	1.432	1.175					140-150	0.7226	1074	99.8, 99.8
160	2.521	2.735	2.144	1.901					150-160	0.8915	1075	99.9, 99.9
170	3.149	3.298	2.906	2.744					160-170	0.7503	1076	100, 100
180	3.460	3.439	3.465	3.437					170-180	0.3053	1076	100, 100
单位: $^{\circ}$	光强: cd									单位: lm		

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-09-05

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数: U:232.27V I:0.0701A P:14.293W PF:0.8776 Freq:49.99Hz 实检光通:1076.31x1 lm		
灯具名称: 2922LED	灯具类型:	灯具重量:
灯具规格: P-2922LED-2x7W3048-CI20031R90-YML100	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

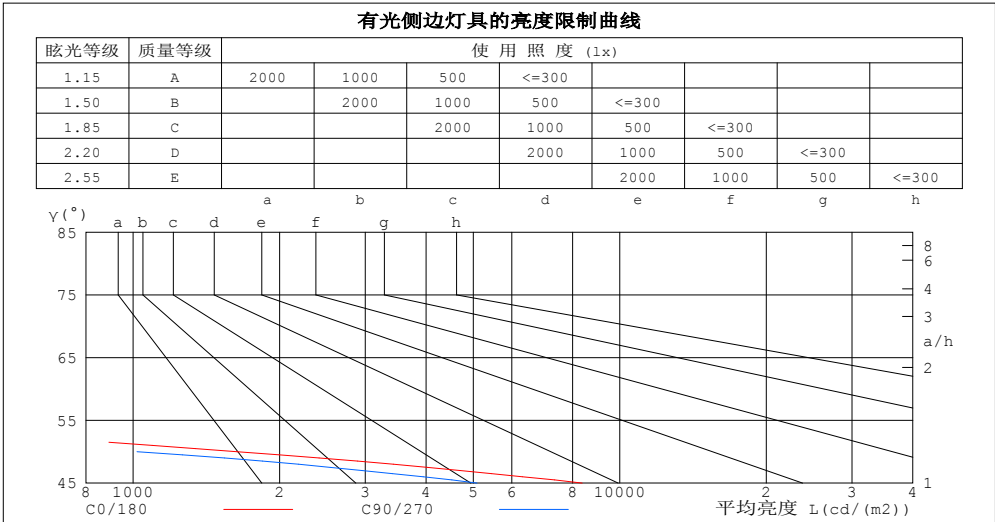

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	0	0
65	14	0
60	56	33
55	163	97
50	1636	1019
45	8370	5089


C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Xie Bi
测试日期:2024-09-05

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.417
环境湿度:65.0%
测试距离:6.810米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:232.27V I:0.0701A P:14.293W PF:0.8776 Freq:49.99Hz 实检光通:1076.31x1 lm		
灯具名称: 2922LED	灯具类型:	灯具重量:
灯具规格: P-2922LED-2x7W3048-CI20031R90-YML100	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.88
3.0	.98	.93	.89	.96	.92	.89	.94	.90	.87	.91	.88	.86	.89	.87	.85	.83
4.0	.92	.87	.83	.91	.86	.82	.89	.85	.81	.87	.83	.80	.85	.82	.80	.78
5.0	.87	.81	.77	.86	.81	.77	.84	.80	.76	.82	.79	.76	.81	.77	.75	.73
6.0	.82	.76	.72	.81	.76	.72	.80	.75	.72	.78	.74	.71	.77	.73	.71	.69
7.0	.77	.72	.68	.77	.72	.68	.76	.71	.67	.74	.70	.67	.73	.70	.67	.65
8.0	.73	.68	.64	.73	.68	.64	.72	.67	.64	.71	.66	.63	.70	.66	.63	.62
9.0	.70	.64	.60	.69	.64	.60	.68	.64	.60	.67	.63	.60	.67	.63	.60	.58
10.0	.66	.61	.57	.66	.61	.57	.65	.60	.57	.64	.60	.57	.64	.60	.57	.56

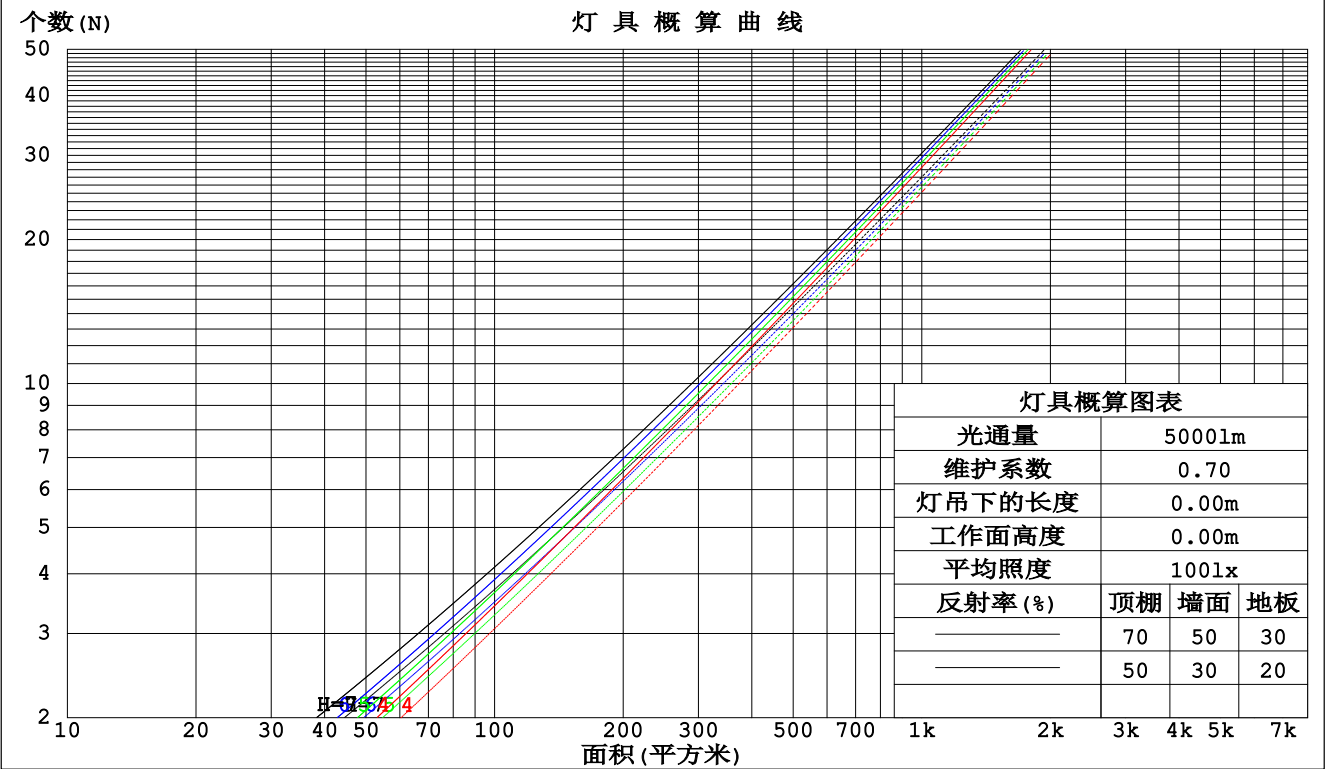

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-09-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:232.27V I:0.0701A P:14.293W PF:0.8776 Freq:49.99Hz 实检光通:1076.31x1 lm					
灯具名称: 2922LED			灯具类型:		灯具重量:
灯具规格: P-2922LED-2x7W3048-CI20031R90-YML100			外型尺寸:		测试编号:
制造厂商:			发光口面:		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.167	.095	.030	.160	.092	.029	.148	.085	.027	.136	.078	.025	.125	.073	.023	
2.0	.159	.087	.027	.154	.085	.026	.143	.080	.025	.133	.075	.023	.124	.070	.022	
3.0	.152	.081	.024	.147	.079	.024	.138	.075	.023	.129	.071	.022	.122	.067	.021	
4.0	.144	.075	.022	.140	.073	.022	.132	.070	.021	.125	.067	.020	.118	.064	.020	
5.0	.138	.070	.020	.134	.069	.020	.127	.066	.020	.121	.064	.019	.115	.062	.018	
6.0	.132	.066	.019	.128	.065	.019	.123	.063	.018	.117	.061	.018	.112	.059	.017	
7.0	.126	.062	.018	.123	.061	.017	.118	.060	.017	.113	.058	.017	.108	.056	.017	
8.0	.121	.059	.017	.118	.058	.016	.114	.057	.016	.109	.055	.016	.105	.054	.016	
9.0	.116	.056	.016	.114	.055	.016	.110	.054	.015	.106	.053	.015	.102	.052	.015	
10.0	.111	.053	.015	.109	.053	.015	.106	.052	.015	.102	.051	.014	.099	.050	.014	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.193	.193	.193	.165	.165	.165	.112	.112	.112	.065	.065	.065	.021	.021	.021	
1.0	.173	.160	.148	.148	.137	.127	.101	.094	.088	.058	.055	.051	.019	.018	.017	
2.0	.157	.135	.116	.134	.116	.101	.092	.080	.070	.053	.047	.041	.017	.015	.013	
3.0	.144	.116	.093	.123	.100	.081	.085	.069	.057	.049	.041	.033	.016	.013	.011	
4.0	.133	.101	.076	.114	.087	.066	.079	.061	.047	.046	.036	.028	.015	.012	.009	
5.0	.124	.089	.063	.107	.077	.055	.074	.054	.039	.043	.032	.023	.014	.010	.008	
6.0	.117	.080	.053	.100	.069	.046	.069	.048	.033	.040	.028	.020	.013	.009	.006	
7.0	.110	.072	.045	.095	.063	.040	.066	.044	.028	.038	.026	.017	.012	.008	.006	
8.0	.105	.066	.039	.090	.057	.034	.062	.040	.024	.036	.024	.014	.012	.008	.005	
9.0	.099	.061	.034	.086	.053	.030	.059	.037	.021	.035	.022	.013	.011	.007	.004	
10.0	.095	.056	.030	.082	.049	.027	.057	.034	.019	.033	.020	.011	.011	.007	.004	

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-09-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:232.27V I:0.0701A P:14.293W PF:0.8776 Freq:49.99Hz 实检光通:1076.31x1 lm												
灯具名称: 2922LED					灯具类型:			灯具重量:				
灯具规格:P-2922LED-2x7W3048-CI20031R90-YML100					外型尺寸:			测试编号:				
制造厂商:					发光口面:			遮光角:				
反射比:	天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
	墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
	工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
房间尺寸		交叉 (Viewed crosswise)					向前 (Viewed endwise)					
x = 2H y = 2H		16.5	17.4	16.7	17.5	17.7	15.0	15.9	15.3	16.1	16.3	
	3H	16.3	17.1	16.6	17.3	17.5	14.9	15.7	15.1	15.9	16.1	
	4H	16.2	17.0	16.5	17.2	17.5	14.8	15.5	15.1	15.8	16.0	
	6H	16.2	16.9	16.5	17.1	17.4	14.7	15.4	15.0	15.7	15.9	
	8H	16.1	16.8	16.4	17.1	17.3	14.6	15.3	15.0	15.6	15.9	
	12H	16.1	16.7	16.4	17.0	17.3	14.6	15.3	14.9	15.5	15.8	
	4H	2H	16.2	17.0	16.5	17.2	17.5	14.8	15.5	15.1	15.8	16.0
		3H	16.1	16.7	16.4	17.0	17.3	14.6	15.3	14.9	15.5	15.8
		4H	16.0	16.6	16.3	16.9	17.2	14.5	15.1	14.9	15.4	15.7
		6H	15.9	16.4	16.2	16.7	17.1	14.4	14.9	14.8	15.3	15.6
		8H	15.8	16.3	16.2	16.7	17.0	14.4	14.8	14.8	15.2	15.6
		12H	15.8	16.2	16.2	16.6	17.0	14.3	14.8	14.7	15.1	15.5
	8H	4H	15.8	16.3	16.2	16.7	17.0	14.4	14.8	14.8	15.2	15.6
		6H	15.7	16.1	16.1	16.5	16.9	14.3	14.7	14.7	15.0	15.5
		8H	15.7	16.0	16.1	16.4	16.9	14.2	14.5	14.6	15.0	15.4
		12H	15.6	15.9	16.1	16.3	16.8	14.1	14.4	14.6	14.9	15.4
	12H	4H	15.8	16.2	16.2	16.6	17.0	14.3	14.8	14.7	15.1	15.5
		6H	15.7	16.0	16.1	16.4	16.9	14.2	14.5	14.6	15.0	15.4
		8H	15.6	15.9	16.1	16.3	16.8	14.1	14.4	14.6	14.9	15.4
不同间隔布灯时,观察者位置引起的UGR变化:												
S = 1.0H		+ 4.0 / -33.4					+ 3.2 / -33.8					
1.5H		+ 6.6 / -29.6					+ 5.9 / -28.5					
2.0H		+ 8.9 / -31.8					+ 8.0 / -34.2					

依据CIE Pub.117计算, 1076lm光源光通表格中的数据需要进行修正($8\log(F/F_0) = 0.3$)。
出光口面积: 0.0092 m²

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-09-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:232.27V I:0.0701A P:14.293W PF:0.8776 Freq:49.99Hz 实检光通:1076.31x1 lm		
灯具名称: 2922LED	灯具类型:	灯具重量:
灯具规格: P-2922LED-2x7W3048-CI20031R90-YML100	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	80	89	83	79	88	83	79	76
0.80	96	91	87	96	91	87	95	90	87	83
1.00	101	95	92	100	95	92	98	95	91	87
1.25	104	99	96	103	99	96	101	98	95	91
1.50	107	102	99	106	102	99	103	100	98	93
2.00	109	105	102	108	104	102	105	102	100	95
2.50	111	107	104	109	106	104	106	104	102	96
3.00	112	109	106	110	108	105	107	105	103	97
4.00	114	112	110	112	110	108	108	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF(总)									UF(直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-09-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:232.27V I:0.0701A P:14.293W PF:0.8776 Freq:49.99Hz 实检光通:1076.31x1 lm		
灯具名称: 2922LED	灯具类型:	灯具重量:
灯具规格: P-2922LED-2x7W3048-CI20031R90-YML100	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

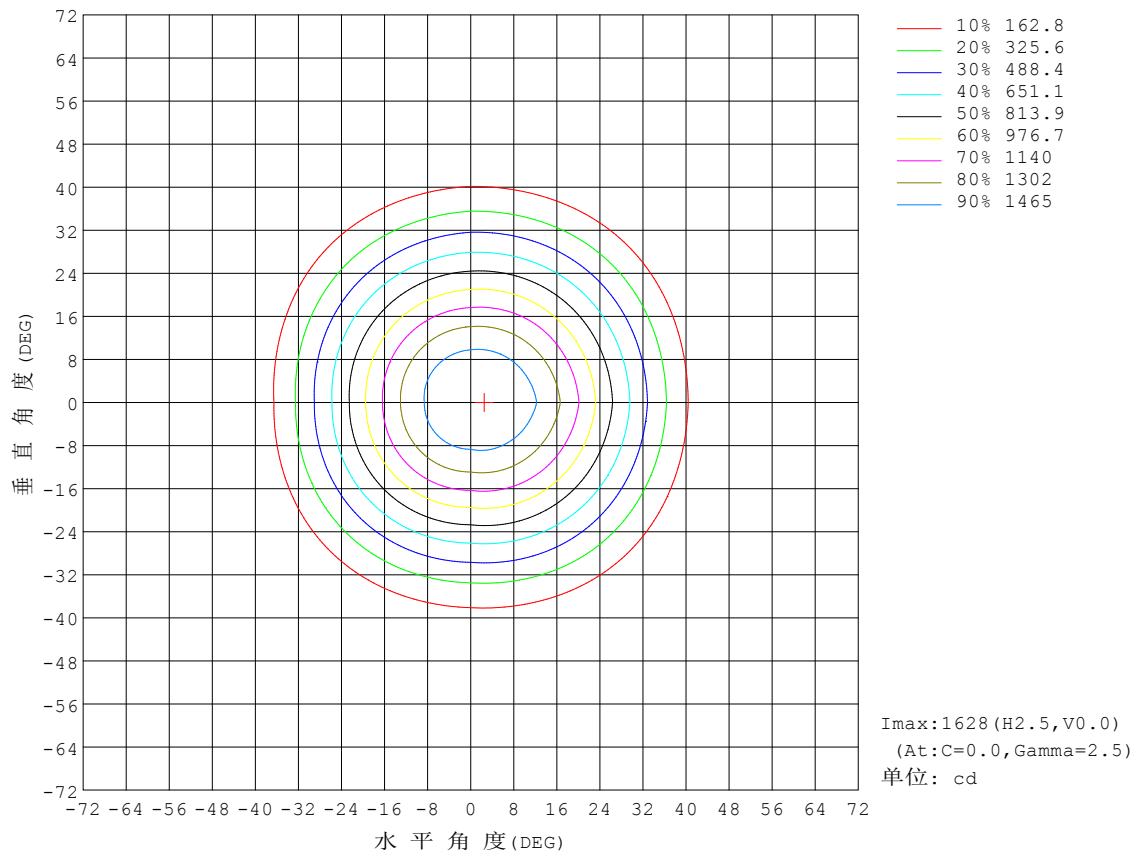


C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-09-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

灯具有效平均照度图

实测参数: U:232.27V I:0.0701A P:14.293W PF:0.8776 Freq:49.99Hz 实检光通:1076.31x1 lm		
灯具名称: 2922LED	灯具类型:	灯具重量:
灯具规格: P-2922LED-2x7W3048-CI20031R90-YML100	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

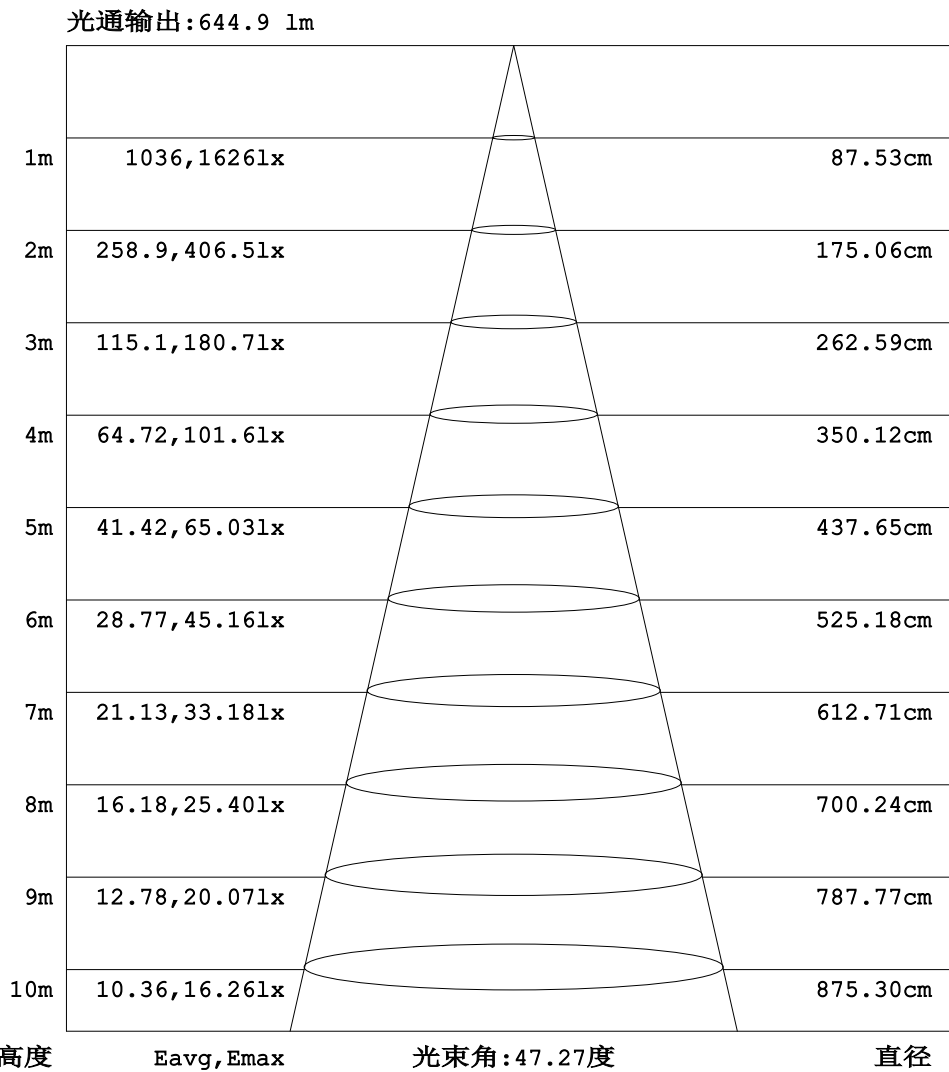


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-09-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:232.27V I:0.0701A P:14.293W PF:0.8776 Freq:49.99Hz 实检光通:1076.31x1 lm		
灯具名称: 2922LED	灯具类型:	灯具重量:
灯具规格: P-2922LED-2x7W3048-CI20031R90-YML100	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

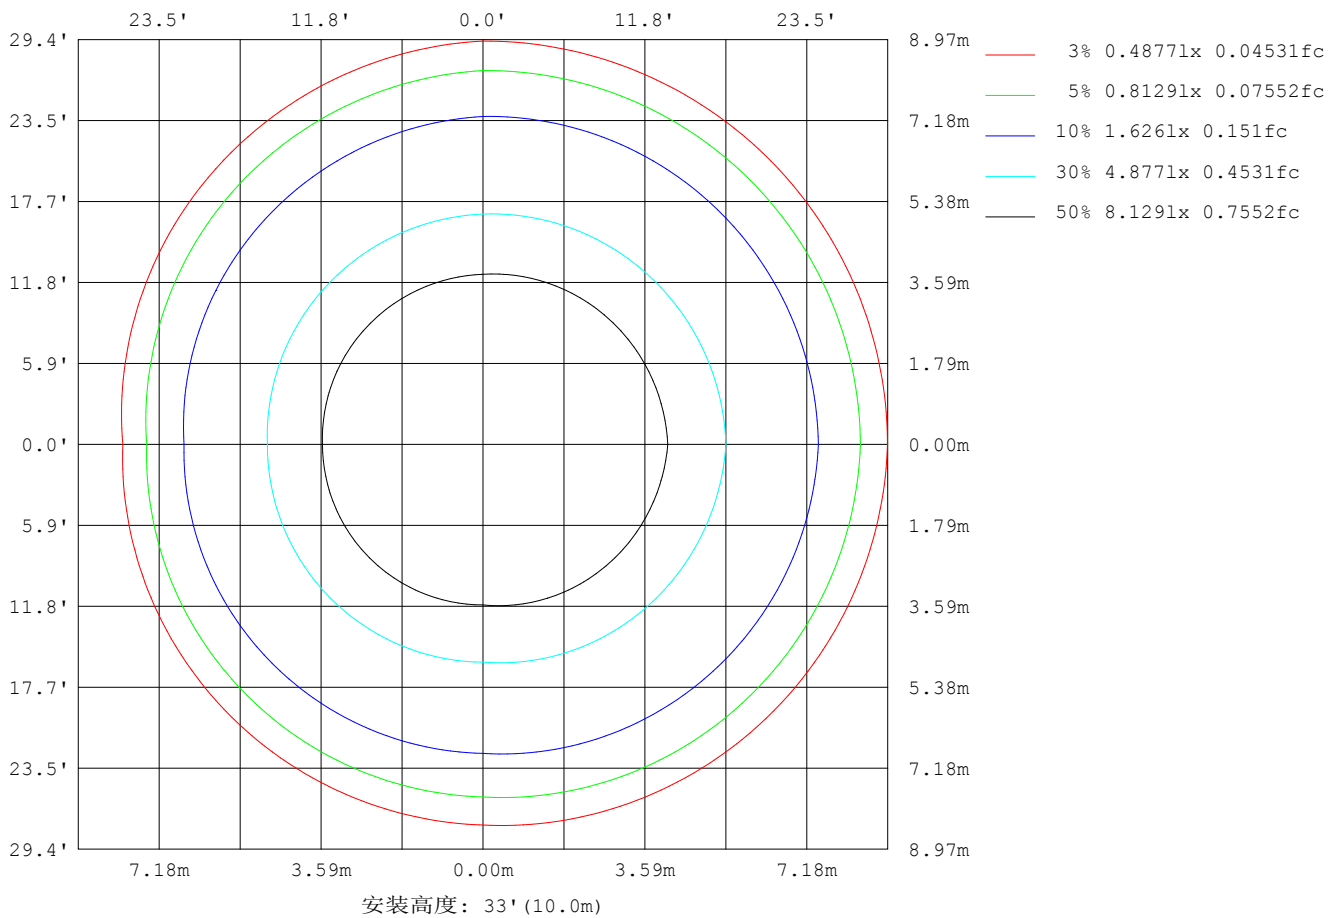

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-09-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:232.27V I:0.0701A P:14.293W PF:0.8776 Freq:49.99Hz 实检光通:1076.31x1 lm		
灯具名称: 2922LED	灯具类型:	灯具重量:
灯具规格: P-2922LED-2x7W3048-CI20031R90-YML100	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	7
L横 (75) av	0
L横 (85) av	0
L纵 (65) av	4
L纵 (75) av	0
L纵 (85) av	0
L45 (65) av	5
L45 (75) av	0
L45 (85) av	0

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Xie Bi
测试日期:2024-09-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度:65.0%
测试距离:6.810米 [K=1.0000]
备注:

平面照度曲线

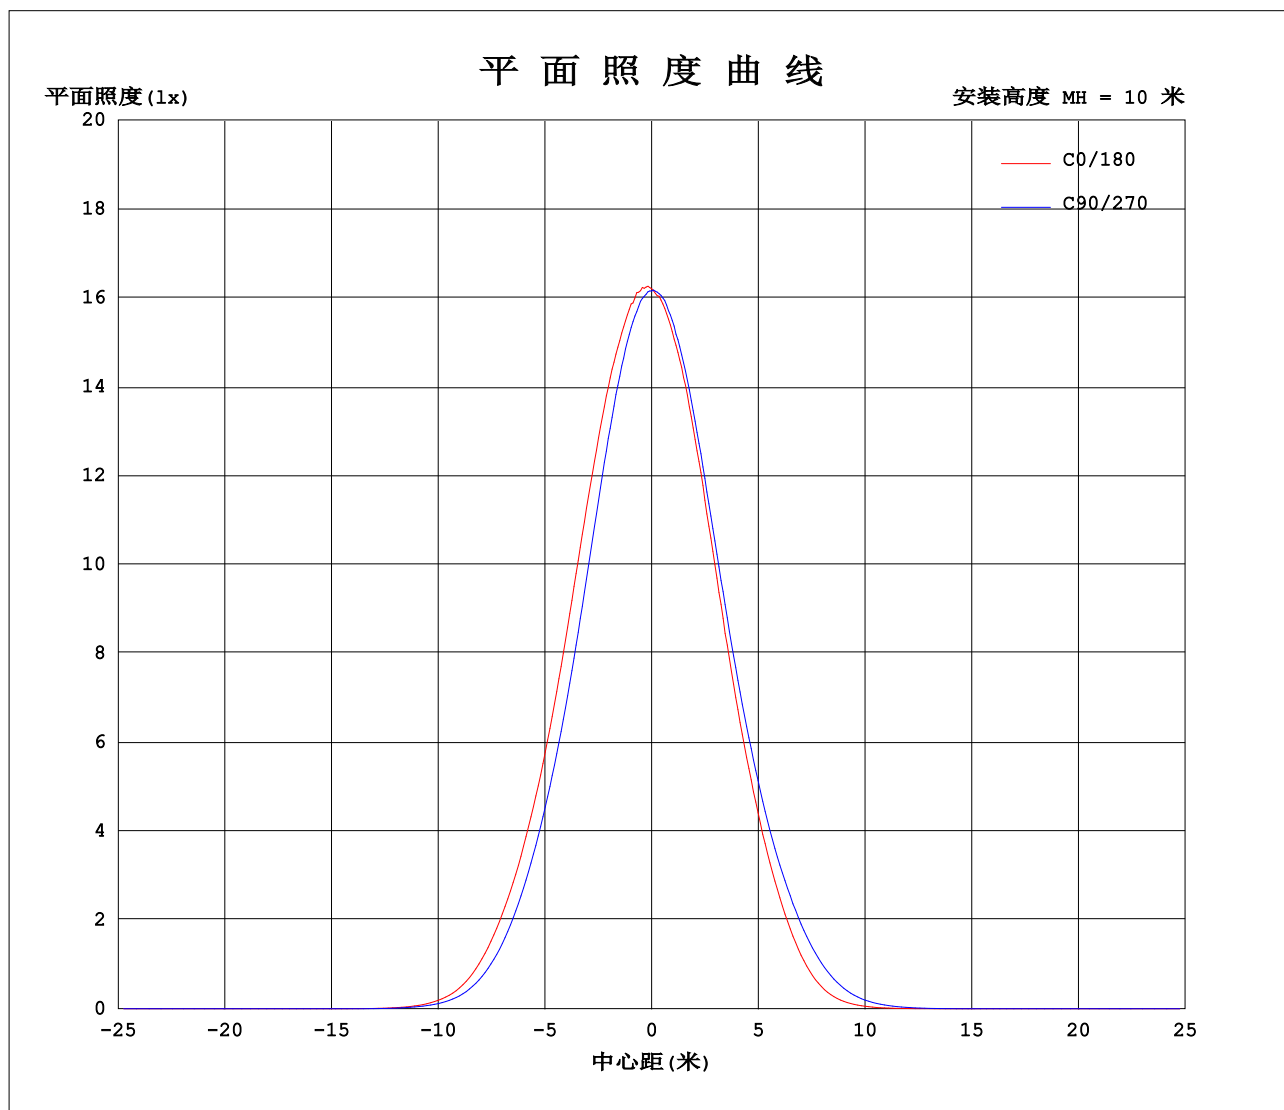

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-09-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:232.27V I:0.0701A P:14.293W PF:0.8776 Freq:49.99Hz 实检光通:1076.31x1 lm		
灯具名称: 2922LED	灯具类型:	灯具重量:
灯具规格: P-2922LED-2x7W3048-CI20031R90-YML100	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

表--1

单位: cd

C (DEG) γ (DEG)	0	90	180	270															
0	1620	1615	1620	1615															
5	1606	1564	1557	1579															
10	1523	1420	1418	1458															
15	1367	1205	1205	1261															
20	1145	951	951	1024															
25	883	705	692	787															
30	631	475	442	555															
35	388	267	219	346															
40	177	113	70.7	167															
45	54.5	33.1	15.9	55.0															
50	9.67	6.03	2.04	11.9															
55	0.86	0.51	0.46	0.83															
60	0.26	0.15	0.16	0.25															
65	0.05	0.00	0.00	0.03															
70	0.00	0.00	0.00	0.00															
75	0.00	0.00	0.00	0.00															
80	0.00	0.00	0.00	0.00															
85	0.00	0.00	0.00	0.00															
90	0.00	0.00	0.00	0.00															
95	0.00	0.00	0.00	0.00															
100	0.00	0.00	0.00	0.00															
105	0.00	0.00	0.00	0.00															
110	0.00	0.00	0.00	0.00															
115	0.00	0.00	0.00	0.00															
120	0.00	0.07	0.02	0.01															
125	0.07	0.21	0.08	0.06															
130	0.23	0.42	0.21	0.16															
135	0.49	0.72	0.42	0.32															
140	0.83	1.09	0.70	0.55															
145	1.25	1.51	1.05	0.84															
150	1.70	1.94	1.43	1.18															
155	2.14	2.35	1.80	1.53															
160	2.52	2.73	2.14	1.90															
165	2.87	3.06	2.52	2.30															
170	3.15	3.30	2.91	2.74															
175	3.36	3.43	3.23	3.13															
180	3.46	3.44	3.46	3.44															

C角度范围: 0度 - 360度

C角度间隔: 90.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: Xie Bi

测试日期: 2024-09-05

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417

环境湿度: 65.0%

测试距离: 6.810米 [K=1.0000]

备注: