


室内灯具光度数据

实测参数: U:232.10V I:0.0297A P:5.1617W PF:0.7486 Freq:49.37Hz 实检光通:323.963x1 lm		
灯具名称: W1617LED	灯具类型:	灯具重量:
灯具规格: P-W1617LED-5W2718-CI35012R90-YML100	外型尺寸:	测试编号:
制造厂商: CETTIGA	发光口面:	遮光角:

光源数据		光度数据				光效: 62.76 lm/W
型号	CLU7A3 0403	峰值光强(cd)	2358	S/MH(C0/180)	0.38	
标称功率(W)	5W	灯具效率(%)	100.0	S/MH(C90/270)	0.36	
额定电源电压(V)	220.0	总光通量(lm)	323.96	η UP,DN(C0-180)	0.2,38.8	
额定光通量(lm)	323.963	CIE分类	直接	η UP,DN(C180-360)	0.1,60.8	
灯具内光源数(只)	1	上射光通比(%)	0.3	CIBSE SHR NOM	0.00	
实测电源电压(V)	220.2	下射光通比(%)	99.7	CIBSE SHR MAX	1.00	

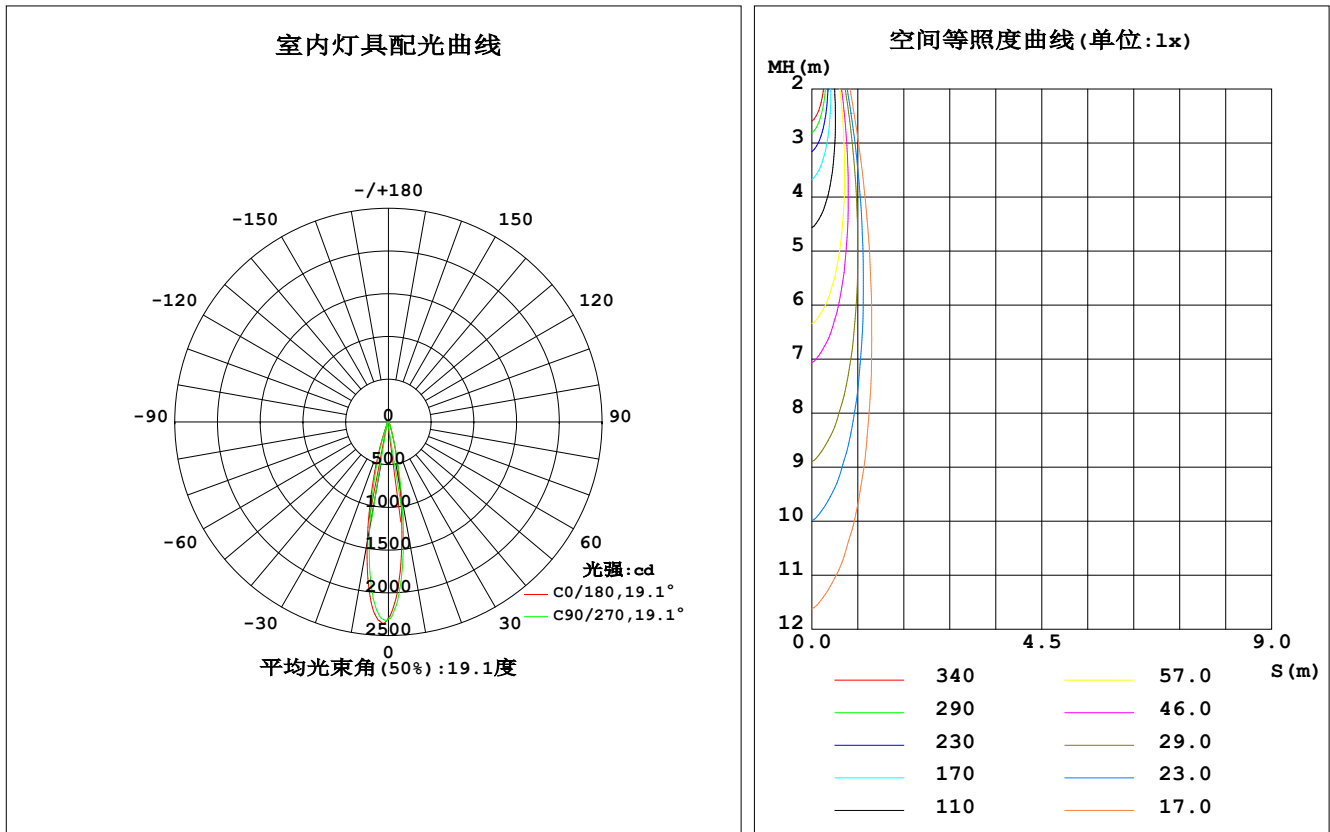

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Xie Bi
测试日期:2024-04-16

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.417
环境湿度:65.0%
测试距离:6.810米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:


γ	C0	C90	C180	C270					$\gamma(^{\circ})$	$\Phi_{\text{环}}$	$\Phi_{\text{总}}$	%lum, lamp
10	785.8	901.4	1428	1262					0- 10	155.9	155.9	48.1, 48.1
20	90.33	94.76	214.5	179.1					10- 20	128.6	284.4	87.8, 87.8
30	18.72	20.04	32.25	29.45					20- 30	27.87	312.3	96.4, 96.4
40	4.473	4.529	6.467	6.143					30- 40	7.754	320.0	98.8, 98.8
50	1.059	0.9580	1.587	1.742					40- 50	2.303	322.3	99.5, 99.5
60	0.1311	0.1465	0.1848	0.2111					50- 60	0.5116	322.8	99.7, 99.7
70	0.0122	0.0069	0	0.0035					60- 70	0.0555	322.9	99.7, 99.7
80	0	0	0	0					70- 80	0.0009	322.9	99.7, 99.7
90	0	0	0	0					80- 90	0	322.9	99.7, 99.7
100	0	0	0	0					90-100	0	322.9	99.7, 99.7
110	0	0	0	0					100-110	0	322.9	99.7, 99.7
120	0	0	0	0					110-120	0	322.9	99.7, 99.7
130	0.0174	0.0628	0	0					120-130	0.0029	322.9	99.7, 99.7
140	0.1045	0.1291	0.0157	0					130-140	0.0259	322.9	99.7, 99.7
150	0.6323	0.5773	0.1413	0.1185					140-150	0.1019	323.0	99.7, 99.7
160	1.721	1.675	0.7493	0.7848					150-160	0.3447	323.4	99.8, 99.8
170	1.709	1.792	1.497	1.510					160-170	0.4378	323.8	100, 100
180	1.337	1.439	1.348	1.444					170-180	0.1456	324.0	100, 100
单位: $^{\circ}$	光强: cd									单位: lm		

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3°C
测试人员: Xie Bi
测试日期: 2024-04-16

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数: U:232.10V I:0.0297A P:5.1617W PF:0.7486 Freq:49.37Hz 实检光通:323.963x1 lm		
灯具名称: W1617LED	灯具类型:	灯具重量:
灯具规格: P-W1617LED-5W2718-CI35012R90-YML100	外型尺寸:	测试编号:
制造厂商: CETTIGA	发光口面:	遮光角:

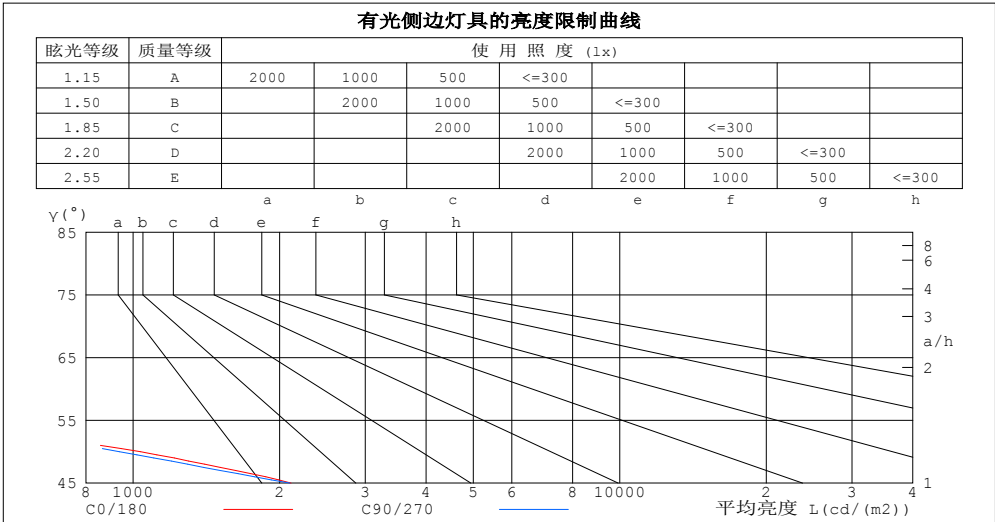

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	22	13
65	39	44
60	165	184
55	337	344
50	1036	937
45	2111	2101


C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Xie Bi
测试日期:2024-04-16

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度:65.0%
测试距离:6.810米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:232.10V I:0.0297A P:5.1617W PF:0.7486 Freq:49.37Hz 实检光通:323.963x1 lm		
灯具名称: W1617LED	灯具类型:	灯具重量:
灯具规格: P-W1617LED-5W2718-CI35012R90-YML100	外型尺寸:	测试编号:
制造厂商: CETTIGA	发光口面:	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.13	1.12	1.10	1.11	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.00	.99	.99	.97
2.0	1.09	1.06	1.04	1.07	1.05	1.03	1.04	1.02	1.00	1.01	.00	.98	.98	.97	.96	.95
3.0	1.05	1.01	.99	1.03	1.00	.98	1.01	.99	.97	.99	.97	.95	.97	.95	.94	.92
4.0	1.01	.98	.95	1.00	.97	.95	.98	.96	.93	.96	.94	.92	.95	.93	.91	.90
5.0	.98	.95	.92	.97	.94	.91	.96	.93	.91	.94	.92	.90	.93	.91	.89	.88
6.0	.96	.92	.89	.95	.91	.89	.94	.91	.88	.92	.90	.88	.91	.89	.87	.86
7.0	.93	.89	.87	.92	.89	.87	.91	.88	.86	.90	.88	.86	.89	.87	.85	.84
8.0	.91	.87	.85	.90	.87	.85	.89	.86	.84	.89	.86	.84	.88	.85	.84	.83
9.0	.89	.85	.83	.88	.85	.83	.88	.85	.82	.87	.84	.82	.86	.84	.82	.81
10.0	.87	.83	.81	.87	.83	.81	.86	.83	.81	.85	.83	.81	.85	.82	.80	.80

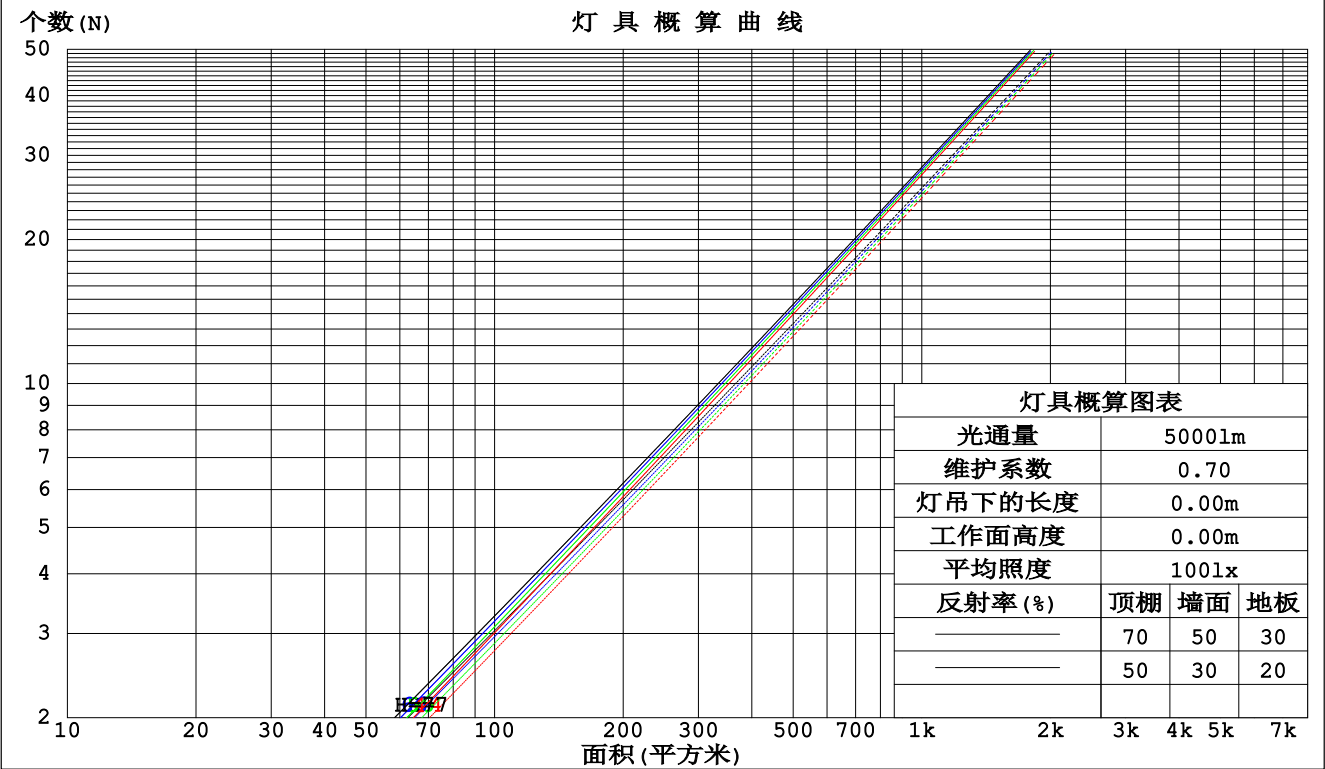

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:232.10V I:0.0297A P:5.1617W PF:0.7486 Freq:49.37Hz 实检光通:323.963x1 lm					
灯具名称: W1617LED			灯具类型:		灯具重量:
灯具规格: P-W1617LED-5W2718-CI35012R90-YML100			外型尺寸:		测试编号:
制造厂商: CETTIGA			发光口面:		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.126	.072	.023	.119	.068	.022	.107	.061	.020	.095	.055	.018	.085	.049	.016	
2.0	.115	.063	.019	.110	.061	.019	.100	.055	.017	.090	.051	.016	.082	.046	.015	
3.0	.107	.057	.017	.102	.055	.016	.094	.051	.015	.086	.047	.014	.079	.043	.013	
4.0	.099	.052	.015	.096	.050	.015	.088	.047	.014	.082	.044	.013	.076	.041	.013	
5.0	.093	.047	.014	.090	.046	.013	.084	.044	.013	.078	.041	.012	.073	.039	.012	
6.0	.088	.044	.013	.085	.043	.012	.080	.041	.012	.075	.039	.011	.070	.037	.011	
7.0	.083	.041	.012	.080	.040	.011	.076	.038	.011	.072	.037	.011	.068	.035	.010	
8.0	.079	.038	.011	.077	.038	.011	.073	.036	.010	.069	.035	.010	.065	.034	.010	
9.0	.075	.036	.010	.073	.036	.010	.070	.034	.010	.066	.033	.010	.063	.032	.009	
10.0	.072	.034	.010	.070	.034	.009	.067	.033	.009	.064	.032	.009	.061	.031	.009	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.170	.160	.151	.146	.138	.130	.100	.095	.090	.057	.055	.052	.018	.018	.017	
2.0	.151	.135	.122	.130	.116	.105	.089	.081	.073	.051	.047	.043	.016	.015	.014	
3.0	.136	.116	.100	.116	.100	.087	.080	.069	.061	.046	.041	.036	.015	.013	.012	
4.0	.122	.100	.083	.105	.087	.072	.072	.060	.051	.042	.035	.030	.013	.012	.010	
5.0	.111	.088	.070	.096	.076	.061	.066	.053	.043	.038	.031	.026	.012	.010	.008	
6.0	.102	.078	.060	.088	.067	.052	.061	.047	.037	.035	.028	.022	.011	.009	.007	
7.0	.094	.069	.052	.081	.060	.045	.056	.042	.032	.033	.025	.019	.011	.008	.006	
8.0	.087	.062	.045	.075	.054	.039	.052	.038	.028	.030	.022	.017	.010	.007	.005	
9.0	.082	.056	.039	.070	.049	.034	.049	.034	.024	.028	.020	.015	.009	.007	.005	
10.0	.076	.052	.035	.066	.045	.031	.046	.031	.022	.027	.019	.013	.009	.006	.004	

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Xie Bi
测试日期:2024-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度:65.0%
测试距离:6.810米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:232.10V I:0.0297A P:5.1617W PF:0.7486 Freq:49.37Hz 实检光通:323.963x1 lm												
灯具名称: W1617LED						灯具类型:			灯具重量:			
灯具规格: P-W1617LED-5W2718-CI35012R90-YML100						外型尺寸:			测试编号:			
制造厂商: CETTIGA						发光口面:			遮光角:			
反射比:	天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
	墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
	工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
房间尺寸		交叉 (Viewed crosswise)					向前 (Viewed endwise)					
x = 2H y = 2H		6.4	6.9	6.6	7.1	7.2	6.7	7.2	6.9	7.4	7.5	
	3H	6.2	6.8	6.5	6.9	7.1	6.5	7.1	6.8	7.3	7.4	
	4H	6.1	6.7	6.4	6.9	7.1	6.5	7.0	6.7	7.2	7.4	
	6H	6.1	6.5	6.3	6.8	7.0	6.4	6.9	6.6	7.1	7.3	
	8H	6.0	6.5	6.3	6.7	7.0	6.3	6.8	6.6	7.0	7.3	
	12H	6.0	6.4	6.3	6.7	7.0	6.3	6.7	6.6	7.0	7.3	
	4H	2H	6.2	6.7	6.4	6.9	7.1	6.5	7.0	6.7	7.2	7.4
		3H	6.0	6.4	6.3	6.7	7.0	6.3	6.7	6.6	7.0	7.3
		4H	5.9	6.3	6.2	6.6	6.9	6.2	6.6	6.5	6.9	7.2
		6H	5.8	6.2	6.1	6.5	6.8	6.1	6.5	6.5	6.8	7.1
		8H	5.7	6.1	6.1	6.4	6.8	6.0	6.4	6.4	6.7	7.1
		12H	5.7	6.0	6.1	6.4	6.7	6.0	6.3	6.4	6.7	7.1
	8H	4H	5.7	6.1	6.1	6.4	6.8	6.0	6.4	6.4	6.7	7.1
		6H	5.6	5.9	6.0	6.3	6.7	5.9	6.2	6.3	6.6	7.0
		8H	5.5	5.8	6.0	6.2	6.7	5.8	6.1	6.3	6.5	7.0
		12H	5.5	5.7	5.9	6.1	6.6	5.8	6.0	6.2	6.4	6.9
12H	4H	5.7	6.0	6.1	6.4	6.7	6.0	6.3	6.4	6.7	7.1	
	6H	5.5	5.8	6.0	6.2	6.7	5.8	6.1	6.3	6.5	7.0	
	8H	5.5	5.7	5.9	6.1	6.6	5.8	6.0	6.2	6.4	6.9	
不同间隔布灯时, 观察者位置引起的UGR变化:												
S = 1.0H		+ 3.0 / -14.0					+ 3.1 / -13.8					
1.5H		+ 4.7 / -11.4					+ 4.9 / -11.3					
2.0H		+ 6.6 / -16.9					+ 6.7 / -17.0					

依据CIE Pub.117计算, 324.0lm光源光通表格中的数据需要进行修正 ($8\log(F/F_0) = -3.9$)。
出光口面积: 0.00159 m²

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:232.10V I:0.0297A P:5.1617W PF:0.7486 Freq:49.37Hz 实检光通:323.963x1 lm		
灯具名称: W1617LED	灯具类型:	灯具重量:
灯具规格: P-W1617LED-5W2718-CI35012R90-YML100	外型尺寸:	测试编号:
制造厂商: CETTIGA	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	82	90	85	82	90	85	81	78
0.80	98	93	89	97	92	89	96	92	89	85
1.00	102	97	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	99	96	92
1.50	108	103	100	106	103	100	104	101	99	94
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	96
3.00	113	109	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	109	109	107	106	99
5.00	116	114	112	113	112	110	110	108	107	100
ROOM INDEX	UF(总)									UF(直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:232.10V I:0.0297A P:5.1617W PF:0.7486 Freq:49.37Hz 实检光通:323.963x1 lm		
灯具名称: W1617LED	灯具类型:	灯具重量:
灯具规格: P-W1617LED-5W2718-CI35012R90-YML100	外型尺寸:	测试编号:
制造厂商: CETTIGA	发光口面:	遮光角:

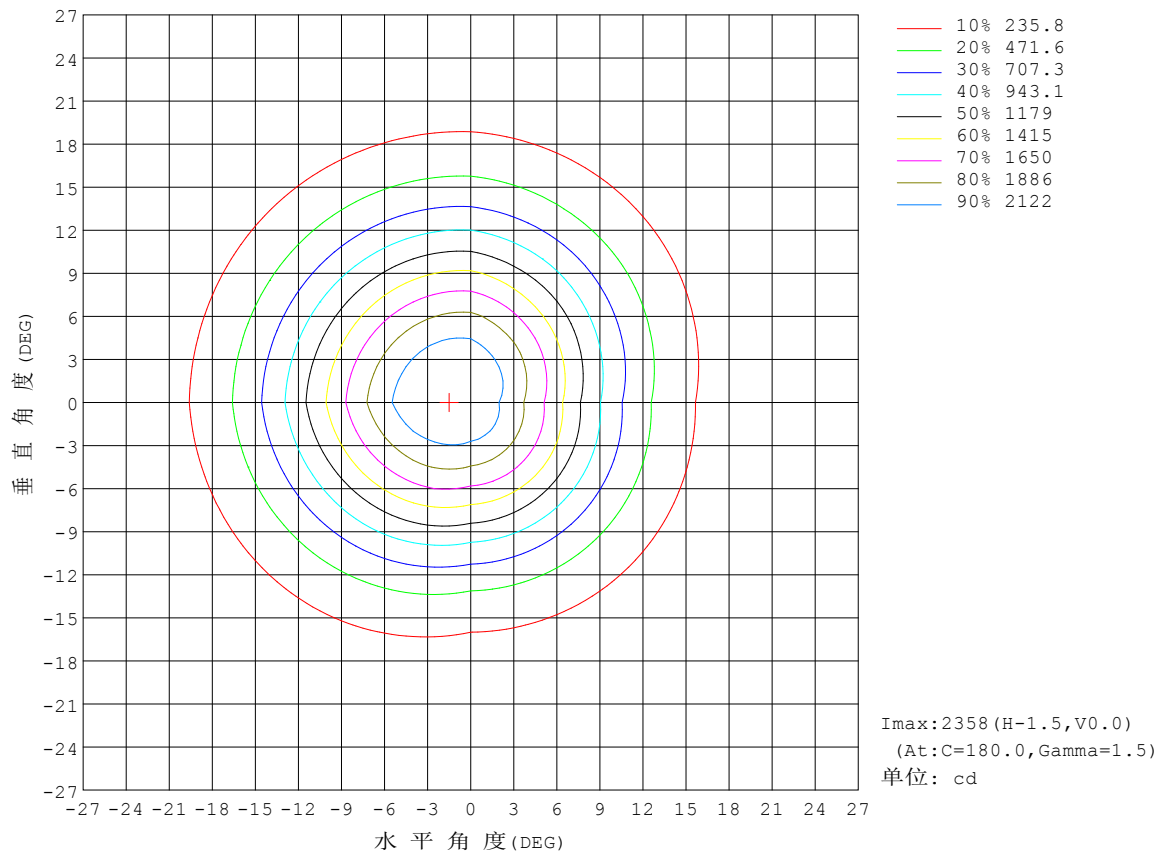


C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

灯具有效平均照度图

实测参数: U:232.10V I:0.0297A P:5.1617W PF:0.7486 Freq:49.37Hz 实检光通:323.963x1 lm		
灯具名称: W1617LED	灯具类型:	灯具重量:
灯具规格: P-W1617LED-5W2718-CI35012R90-YML100	外型尺寸:	测试编号:
制造厂商: CETTIGA	发光口面:	遮光角:

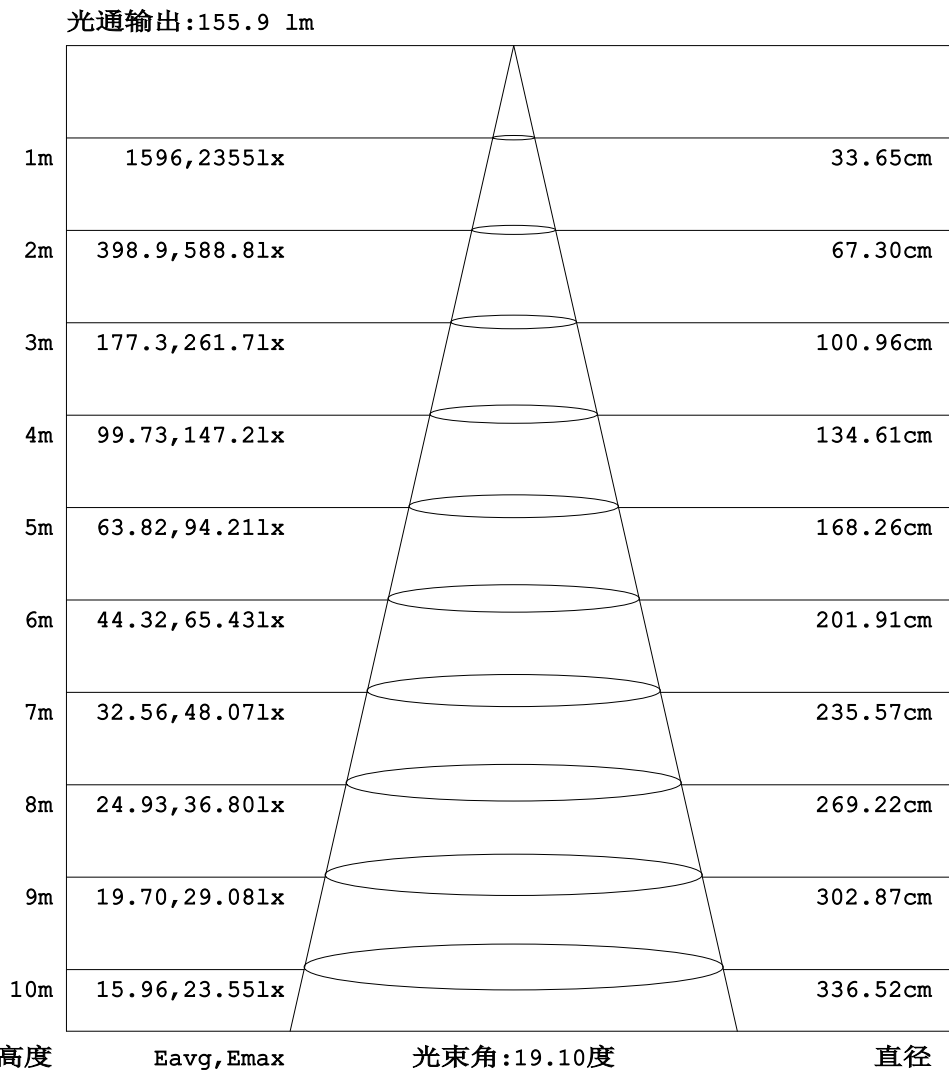


注:曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:232.10V I:0.0297A P:5.1617W PF:0.7486 Freq:49.37Hz 实检光通:323.963x1 lm		
灯具名称: W1617LED	灯具类型:	灯具重量:
灯具规格: P-W1617LED-5W2718-CI35012R90-YML100	外型尺寸:	测试编号:
制造厂商: CETTIGA	发光口面:	遮光角:

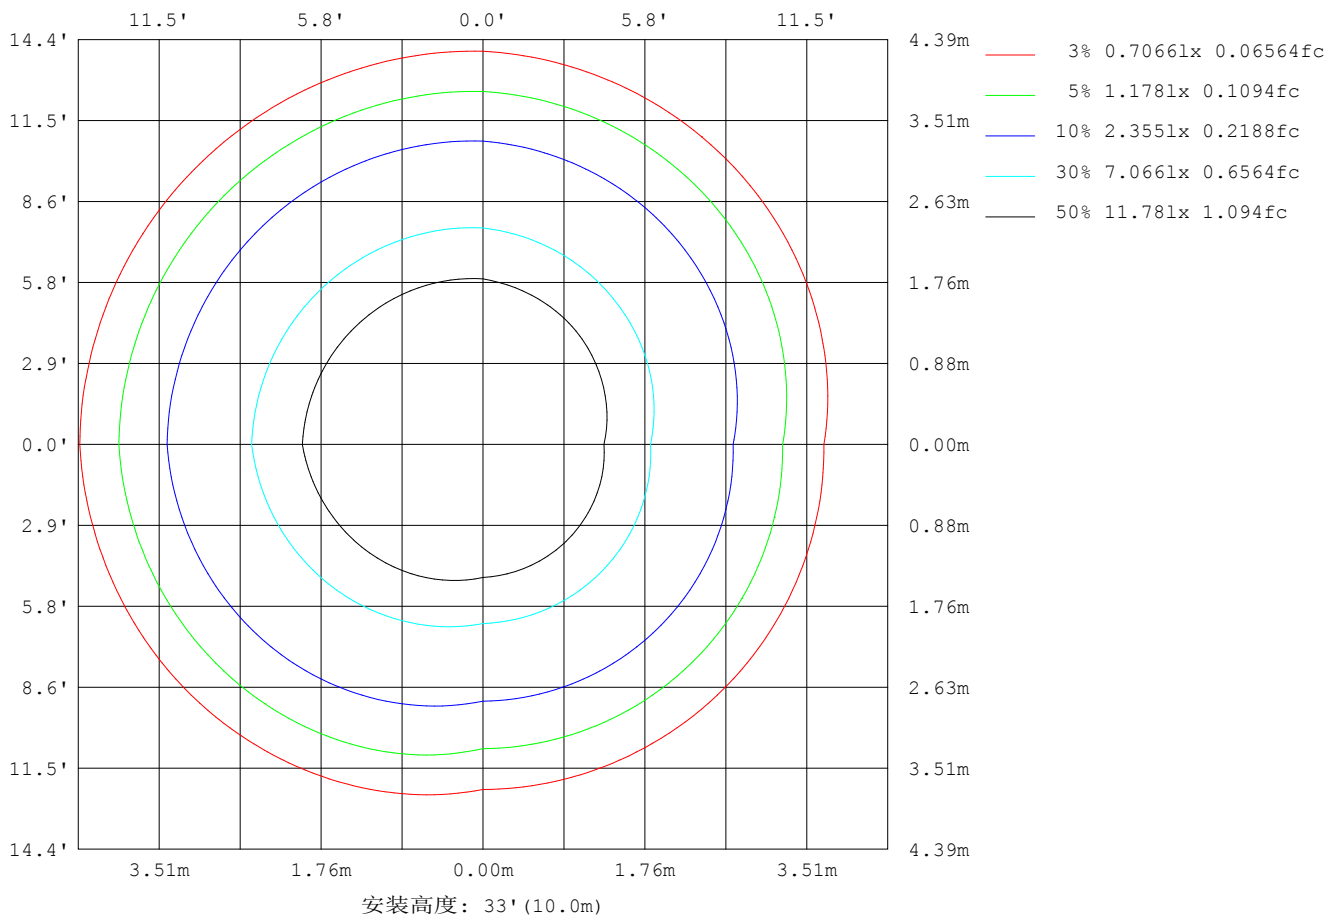

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:232.10V I:0.0297A P:5.1617W PF:0.7486 Freq:49.37Hz 实检光通:323.963x1 lm		
灯具名称: W1617LED	灯具类型:	灯具重量:
灯具规格: P-W1617LED-5W2718-CI35012R90-YML100	外型尺寸:	测试编号:
制造厂商: CETTIGA	发光口面:	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	38
L横 (75) av	0
L横 (85) av	0
L纵 (65) av	41
L纵 (75) av	0
L纵 (85) av	0
L45 (65) av	40
L45 (75) av	0
L45 (85) av	0

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Xie Bi
测试日期:2024-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度:65.0%
测试距离:6.810米 [K=1.0000]
备注:

平面照度曲线

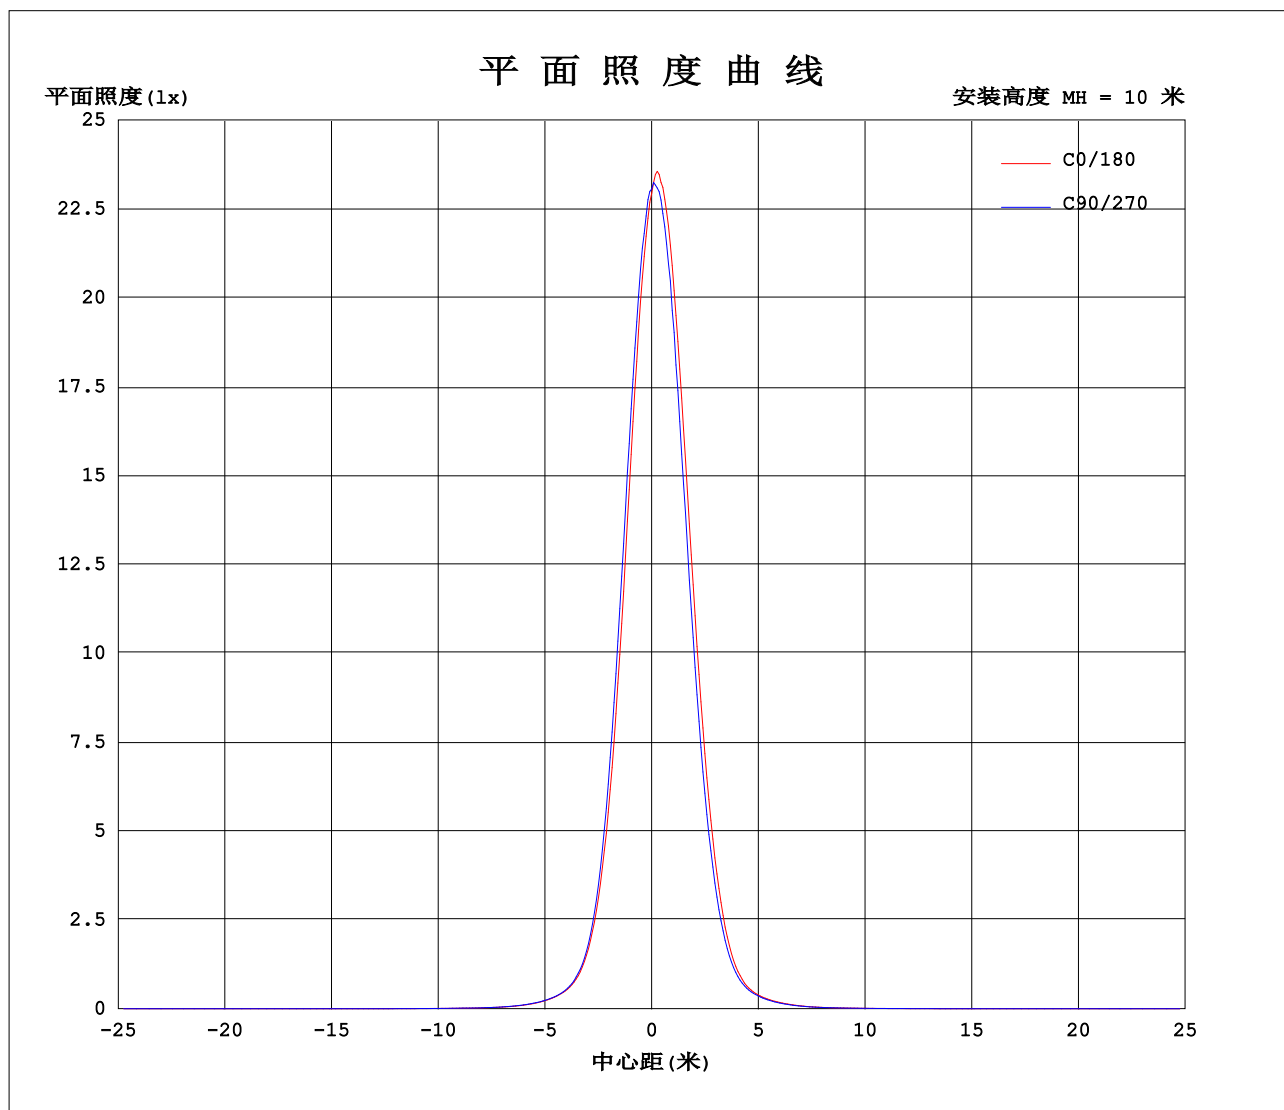

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Xie Bi
测试日期: 2024-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度: 65.0%
测试距离: 6.810米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:232.10V I:0.0297A P:5.1617W PF:0.7486 Freq:49.37Hz 实检光通:323.963x1 lm		
灯具名称: W1617LED	灯具类型:	灯具重量:
灯具规格: P-W1617LED-5W2718-CI35012R90-YML100	外型尺寸:	测试编号:
制造厂商: CETTIGA	发光口面:	遮光角:

表--1		单位: cd																
C (DEG) γ (DEG)	0	90	180	270														
0	2294	2306	2294	2306														
5	1671	1791	2173	2071														
10	786	901	1428	1262														
15	272	301	653	544														
20	90.3	94.8	215	179														
25	40.1	41.5	70.2	63.7														
30	18.7	20.0	32.2	29.5														
35	8.74	9.33	14.6	13.2														
40	4.47	4.53	6.47	6.14														
45	2.37	2.36	3.25	3.26														
50	1.06	0.96	1.59	1.74														
55	0.31	0.31	0.65	0.70														
60	0.13	0.15	0.18	0.21														
65	0.03	0.03	0.02	0.03														
70	0.01	0.01	0.00	0.00														
75	0.00	0.00	0.00	0.00														
80	0.00	0.00	0.00	0.00														
85	0.00	0.00	0.00	0.00														
90	0.00	0.00	0.00	0.00														
95	0.00	0.00	0.00	0.00														
100	0.00	0.00	0.00	0.00														
105	0.00	0.00	0.00	0.00														
110	0.00	0.00	0.00	0.00														
115	0.00	0.00	0.00	0.00														
120	0.00	0.00	0.00	0.00														
125	0.00	0.00	0.00	0.00														
130	0.02	0.06	0.00	0.00														
135	0.03	0.08	0.00	0.00														
140	0.10	0.13	0.02	0.00														
145	0.25	0.25	0.06	0.03														
150	0.63	0.58	0.14	0.12														
155	1.20	1.12	0.35	0.36														
160	1.72	1.67	0.75	0.78														
165	2.06	1.93	1.25	1.25														
170	1.71	1.79	1.50	1.51														
175	1.38	1.50	1.46	1.50														
180	1.34	1.44	1.35	1.44														

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Xie Bi
测试日期:2024-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.417
环境湿度:65.0%
测试距离:6.810米 [K=1.0000]
备注: