



CETTIG 三

格栅系列

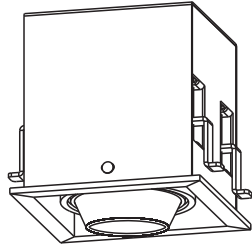

适用于天花板厚度5-20mm。

型号	功率	产品规格	开孔尺寸
2811LED	15W/20W/25W	L130xW130xH135mm	L120xW120mm
2812LED	2x15W/2x20W/2x25W	L235xW130xH135mm	L225xW120mm
2813LED	3x15W/3x20W/3x25W	L340xW130xH135mm	L330xW120mm
2911LED	25W/30W/36W/40W	L166xW166xH150mm	L156xW156mm
2912LED	2x25W/2x30W/2x36W/2x40W	L318xW166xH150mm	L308xW156mm
2913LED	3x25W/3x30W/3x36W/3x40W	L463xW166xH150mm	L453xW156mm
2161LED	8W/12W	L103xW103x120mm	L93xW93mm
2162LED	2x8W/2x12W	L200xW103x120mm	L190xW93mm
2163LED	3x8W/3x12W	L285xW103x120mm	L275xW93mm
2261LED	8W/12W	L103xW103x135mm	L93xW93mm
2262LED	2x8W/2x12W	L200xW103x135mm	L190xW93mm
2263LED	3x8W/3x12W	L285xW103x135mm	L275xW93mm

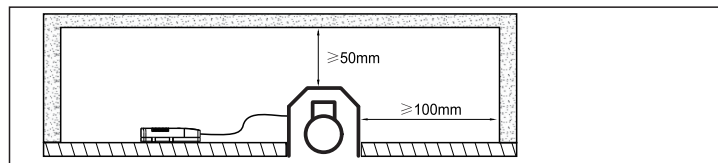

为安全起见，安装和拆卸灯具须由专业电工按照电气和电子工程师协会条例进行操作。




警告：触电危险……




不要注视亮着的光源……



废弃的灯具禁止丢入生活垃圾内……










灯具不能被隔热衬垫或类似材料覆盖。



灯具不可嵌入普通可燃材料。

安装步骤：

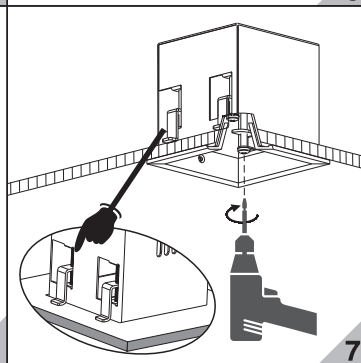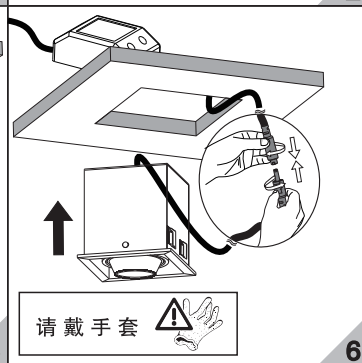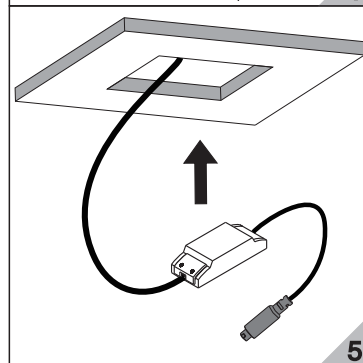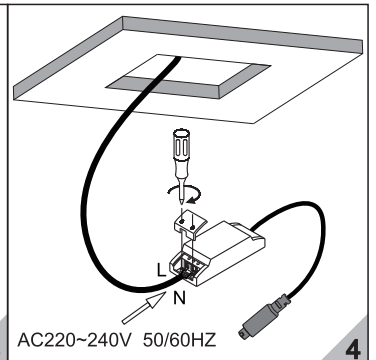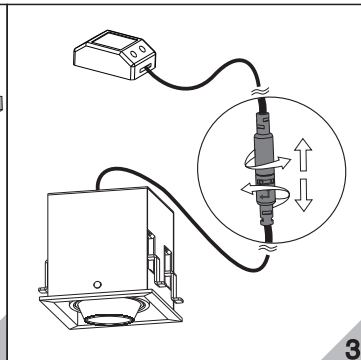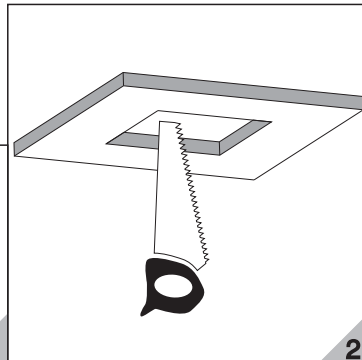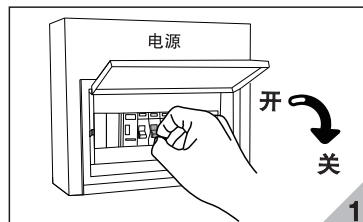

拆卸维护：

将灯具从天花板里往下拔出。

